



SIRIUS soft starter 200-480 V 630 A, 24 V AC/DC Screw terminals

|                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>product brand name</b>                    | SIRIUS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>product category</b>                      | Hybrid switching devices                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>product designation</b>                   | Soft starter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>product type designation</b>              | 3RW55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>manufacturer's article number</b>         | <ul style="list-style-type: none"> <li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFINET high-feature usable <a href="#">3RW5950-0CH00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3VA2580-6HN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V <a href="#">3VA2580-6HN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3VA2716-7AB05-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 500 V at inside-delta circuit <a href="#">3VA2716-7AB05-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V 2x3NA3365-6; Type of coordination 1, Iq = 65 kA</li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NB3350-1KK26: Type of coordination 2, Iq = 65 kA</a></li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NC3343-1U: Type of coordination 2, Iq = 65 kA</a></li> </ul> |
| <b>General technical data</b>                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>starting voltage [%]</b>                  | 20 ... 100 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>stopping voltage [%]</b>                  | 50 %; non-adjustable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>start-up ramp time of soft starter</b>    | 0 ... 360 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>ramp-down time of soft starter</b>        | 0 ... 360 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>start torque [%]</b>                      | 10 ... 100 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>stopping torque [%]</b>                   | 10 ... 100 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>torque limitation [%]</b>                 | 20 ... 200 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>current limiting value [%] adjustable</b> | 125 ... 800 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>breakaway voltage [%] adjustable</b>      | 40 ... 100 %                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>breakaway time adjustable</b>             | 0 ... 2 s                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>number of parameter sets</b>              | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>accuracy class</b>                        | 5 (based on IEC 61557-12)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>certificate of suitability</b>            | <ul style="list-style-type: none"> <li>• CE marking Yes</li> <li>• UL approval Yes</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                                              |                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • CSA approval                                               | Yes                                                                                                                                                                                                                                                 |
| <b>product component</b>                                     |                                                                                                                                                                                                                                                     |
| • HMI-High Feature                                           | Yes                                                                                                                                                                                                                                                 |
| • is supported HMI-High Feature                              | Yes                                                                                                                                                                                                                                                 |
| <b>product feature integrated bypass contact system</b>      | Yes                                                                                                                                                                                                                                                 |
| <b>number of controlled phases</b>                           | 3                                                                                                                                                                                                                                                   |
| <b>current unbalance limiting value [%]</b>                  | 10 ... 60 %                                                                                                                                                                                                                                         |
| <b>ground-fault monitoring limiting value [%]</b>            | 10 ... 95 %                                                                                                                                                                                                                                         |
| <b>buffering time in the event of power failure</b>          |                                                                                                                                                                                                                                                     |
| • for main current circuit                                   | 100 ms                                                                                                                                                                                                                                              |
| • for control circuit                                        | 100 ms                                                                                                                                                                                                                                              |
| <b>idle time adjustable</b>                                  | 0 ... 255 s                                                                                                                                                                                                                                         |
| <b>insulation voltage rated value</b>                        | 480 V                                                                                                                                                                                                                                               |
| <b>degree of pollution</b>                                   | 3, acc. to IEC 60947-4-2                                                                                                                                                                                                                            |
| <b>impulse voltage rated value</b>                           | 6 kV                                                                                                                                                                                                                                                |
| <b>blocking voltage of the thyristor maximum</b>             | 1 400 V                                                                                                                                                                                                                                             |
| <b>service factor</b>                                        | 1.15                                                                                                                                                                                                                                                |
| <b>surge voltage resistance rated value</b>                  | 6 kV                                                                                                                                                                                                                                                |
| <b>maximum permissible voltage for protective separation</b> |                                                                                                                                                                                                                                                     |
| • between main and auxiliary circuit                         | 480 V; does not apply for thermistor connection                                                                                                                                                                                                     |
| <b>shock resistance</b>                                      | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting                                                                                                                                                                                       |
| <b>vibration resistance</b>                                  | 15 mm up to 6 Hz; 2 g up to 500 Hz                                                                                                                                                                                                                  |
| <b>recovery time after overload trip adjustable</b>          | 60 ... 1 800 s                                                                                                                                                                                                                                      |
| utilization category according to IEC 60947-4-2              | AC 53a                                                                                                                                                                                                                                              |
| <b>reference code according to IEC 81346-2</b>               | Q                                                                                                                                                                                                                                                   |
| <b>Substance Prohibitance (day/month/year)</b>               | 02/11/2019                                                                                                                                                                                                                                          |
| <b>SVHC substance name</b>                                   | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5<br>Melamine CAS-No. 108-78-1<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1 |
| <b>Net Weight</b>                                            | 55.5 kg                                                                                                                                                                                                                                             |
| <b>product function</b>                                      |                                                                                                                                                                                                                                                     |
| • ramp-up (soft starting)                                    | Yes                                                                                                                                                                                                                                                 |
| • soft stopping                                              | Yes                                                                                                                                                                                                                                                 |
| • breakaway pulse                                            | Yes                                                                                                                                                                                                                                                 |
| • adjustable current limitation                              | Yes                                                                                                                                                                                                                                                 |
| • creep speed in both directions of rotation                 | Yes                                                                                                                                                                                                                                                 |
| • pump stop                                                  | Yes                                                                                                                                                                                                                                                 |
| • DC braking                                                 | Yes                                                                                                                                                                                                                                                 |
| • motor heating                                              | Yes                                                                                                                                                                                                                                                 |
| • min/max pointer                                            | Yes                                                                                                                                                                                                                                                 |
| • trace function                                             | Yes                                                                                                                                                                                                                                                 |
| • intrinsic device protection                                | Yes                                                                                                                                                                                                                                                 |
| • motor overload protection                                  | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.                          |
| • evaluation of thermistor motor protection                  | Yes; Type A PTC or Klaxon / Thermoclick                                                                                                                                                                                                             |
| • inside-delta circuit                                       | Yes                                                                                                                                                                                                                                                 |
| • auto-RESET                                                 | Yes                                                                                                                                                                                                                                                 |
| • manual RESET                                               | Yes                                                                                                                                                                                                                                                 |
| • remote reset                                               | Yes                                                                                                                                                                                                                                                 |
| • communication function                                     | Yes                                                                                                                                                                                                                                                 |
| • operating measured value display                           | Yes                                                                                                                                                                                                                                                 |
| • event list                                                 | Yes                                                                                                                                                                                                                                                 |
| • error logbook                                              | Yes                                                                                                                                                                                                                                                 |
| • via software parameterizable                               | Yes                                                                                                                                                                                                                                                 |
| • via software configurable                                  | Yes                                                                                                                                                                                                                                                 |
| • screw terminal                                             | Yes                                                                                                                                                                                                                                                 |
| • spring-loaded terminal                                     | No                                                                                                                                                                                                                                                  |

|                                                                                                           |                                                                                               |
|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• <b>PROFenergy</b></li> </ul>                                     | Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules |
| <ul style="list-style-type: none"> <li>• <b>firmware update</b></li> </ul>                                | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• <b>removable terminal for control circuit</b></li> </ul>         | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• voltage ramp</li> </ul>                                          | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• torque control</li> </ul>                                        | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• combined braking</li> </ul>                                      | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• analog output</li> </ul>                                         | Yes; 4 ... 20 mA (default) / 0 ... 10 V                                                       |
| <ul style="list-style-type: none"> <li>• programmable control inputs/outputs</li> </ul>                   | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• condition monitoring</li> </ul>                                  | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• automatic parameterisation</li> </ul>                            | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• application wizards</li> </ul>                                   | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• alternative stopping mode</li> </ul>                             | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• emergency operation mode</li> </ul>                              | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• reversing operation</li> </ul>                                   | Yes                                                                                           |
| <ul style="list-style-type: none"> <li>• soft starting at heavy starting conditions</li> </ul>            | Yes                                                                                           |
| <b>Power Electronics</b>                                                                                  |                                                                                               |
| <b>operational current</b>                                                                                |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> </ul>                                  | 630 A                                                                                         |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value minimum</li> </ul>                          | 126 A                                                                                         |
| <ul style="list-style-type: none"> <li>• at 50 °C rated value</li> </ul>                                  | 561 A                                                                                         |
| <ul style="list-style-type: none"> <li>• at 60 °C rated value</li> </ul>                                  | 510 A                                                                                         |
| <b>operational current at inside-delta circuit</b>                                                        |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 40 °C rated value</li> </ul>                                  | 1 091 A                                                                                       |
| <ul style="list-style-type: none"> <li>• at 50 °C rated value</li> </ul>                                  | 972 A                                                                                         |
| <ul style="list-style-type: none"> <li>• at 60 °C rated value</li> </ul>                                  | 883 A                                                                                         |
| <b>operating voltage</b>                                                                                  |                                                                                               |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>                                           | 200 ... 480 V                                                                                 |
| <ul style="list-style-type: none"> <li>• at inside-delta circuit rated value</li> </ul>                   | 200 ... 480 V                                                                                 |
| <b>relative negative tolerance of the operating voltage</b>                                               | -15 %                                                                                         |
| <b>relative positive tolerance of the operating voltage</b>                                               | 10 %                                                                                          |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b>                       | -15 %                                                                                         |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b>                       | 10 %                                                                                          |
| <b>operating power for 3-phase motors</b>                                                                 |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 230 V at 40 °C rated value</li> </ul>                         | 200 kW                                                                                        |
| <ul style="list-style-type: none"> <li>• at 230 V at inside-delta circuit at 40 °C rated value</li> </ul> | 355 kW                                                                                        |
| <ul style="list-style-type: none"> <li>• at 400 V at 40 °C rated value</li> </ul>                         | 355 kW                                                                                        |
| <ul style="list-style-type: none"> <li>• at 400 V at inside-delta circuit at 40 °C rated value</li> </ul> | 630 kW                                                                                        |
| <b>Operating frequency 1 rated value</b>                                                                  | 50 Hz                                                                                         |
| <b>Operating frequency 2 rated value</b>                                                                  | 60 Hz                                                                                         |
| <b>relative negative tolerance of the operating frequency</b>                                             | -10 %                                                                                         |
| <b>relative positive tolerance of the operating frequency</b>                                             | 10 %                                                                                          |
| <b>minimum load [%]</b>                                                                                   | 10 %; Relative to set le                                                                      |
| <b>power loss [W] for rated value of the current at AC</b>                                                |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 40 °C after startup</li> </ul>                                | 189 W                                                                                         |
| <ul style="list-style-type: none"> <li>• at 50 °C after startup</li> </ul>                                | 135 W                                                                                         |
| <ul style="list-style-type: none"> <li>• at 60 °C after startup</li> </ul>                                | 108 W                                                                                         |
| <b>power loss [W] at AC at current limitation 350%</b>                                                    |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 40 °C during startup</li> </ul>                               | 9 538 W                                                                                       |
| <ul style="list-style-type: none"> <li>• at 50 °C during startup</li> </ul>                               | 8 115 W                                                                                       |
| <ul style="list-style-type: none"> <li>• at 60 °C during startup</li> </ul>                               | 7 123 W                                                                                       |
| <b>type of the motor protection</b>                                                                       | Electronic, tripping in the event of thermal overload of the motor                            |
| <b>Control circuit/ Control</b>                                                                           |                                                                                               |
| <b>type of voltage of the control supply voltage</b>                                                      | AC/DC                                                                                         |
| <b>control supply voltage at AC</b>                                                                       |                                                                                               |
| <ul style="list-style-type: none"> <li>• at 50 Hz rated value</li> </ul>                                  | 24 V                                                                                          |
| <ul style="list-style-type: none"> <li>• at 60 Hz rated value</li> </ul>                                  | 24 V                                                                                          |
| <b>relative negative tolerance of the control supply voltage at</b>                                       | -20 %                                                                                         |

|                                                                                 |                                                                                                                                                                                |
|---------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC at 50 Hz</b>                                                              |                                                                                                                                                                                |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b> | 20 %                                                                                                                                                                           |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b> | -20 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b> | 20 %                                                                                                                                                                           |
| <b>control supply voltage frequency</b>                                         | 50 ... 60 Hz                                                                                                                                                                   |
| <b>relative negative tolerance of the control supply voltage frequency</b>      | -10 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage frequency</b>      | 10 %                                                                                                                                                                           |
| <b>control supply voltage at DC rated value</b>                                 | 24 V                                                                                                                                                                           |
| <b>relative negative tolerance of the control supply voltage at DC</b>          | -20 %                                                                                                                                                                          |
| <b>relative positive tolerance of the control supply voltage at DC</b>          | 20 %                                                                                                                                                                           |
| <b>control supply current in standby mode rated value</b>                       | 440 mA                                                                                                                                                                         |
| <b>holding current in bypass operation rated value</b>                          | 1 100 mA                                                                                                                                                                       |
| <b>inrush current by closing the bypass contacts maximum</b>                    | 6.7 A                                                                                                                                                                          |
| inrush current peak at application of control supply voltage maximum            | 7.5 A                                                                                                                                                                          |
| duration of inrush current peak at application of control supply voltage        | 20 ms                                                                                                                                                                          |
| <b>design of the overvoltage protection</b>                                     | Varistor                                                                                                                                                                       |
| <b>design of short-circuit protection for control circuit</b>                   | 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>                                                          |                                                                                                                                                                                |
| <b>number of digital inputs</b>                                                 | 4                                                                                                                                                                              |
| • parameterizable                                                               | 4                                                                                                                                                                              |
| • <b>number of digital outputs</b>                                              | 4                                                                                                                                                                              |
| • number of digital outputs parameterizable                                     | 3                                                                                                                                                                              |
| • number of digital outputs not parameterizable                                 | 1                                                                                                                                                                              |
| <b>digital output version</b>                                                   | 3 normally-open contacts (NO) / 1 changeover contact (CO)                                                                                                                      |
| <b>number of analog outputs</b>                                                 | 1                                                                                                                                                                              |
| <b>switching capacity current of the relay outputs</b>                          |                                                                                                                                                                                |
| • at AC-15 at 250 V rated value                                                 | 3 A                                                                                                                                                                            |
| • at DC-13 at 24 V rated value                                                  | 1 A                                                                                                                                                                            |
| <b>Installation/ mounting/ dimensions</b>                                       |                                                                                                                                                                                |
| <b>mounting position</b>                                                        | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)                                                                                                     |
| <b>fastening method</b>                                                         | screw fixing                                                                                                                                                                   |
| <b>height</b>                                                                   | 764 mm                                                                                                                                                                         |
| <b>width</b>                                                                    | 478 mm                                                                                                                                                                         |
| <b>depth</b>                                                                    | 241 mm                                                                                                                                                                         |
| required spacing with side-by-side mounting                                     |                                                                                                                                                                                |
| • forwards                                                                      | 10 mm                                                                                                                                                                          |
| • backwards                                                                     | 0 mm                                                                                                                                                                           |
| • upwards                                                                       | 100 mm                                                                                                                                                                         |
| • downwards                                                                     | 75 mm                                                                                                                                                                          |
| • at the side                                                                   | 5 mm                                                                                                                                                                           |
| <b>weight without packaging</b>                                                 | 45 kg                                                                                                                                                                          |
| <b>Connections/ Terminals</b>                                                   |                                                                                                                                                                                |
| <b>type of electrical connection</b>                                            |                                                                                                                                                                                |
| • for main current circuit                                                      | busbar connection                                                                                                                                                              |
| • for control circuit                                                           | screw-type terminals                                                                                                                                                           |
| <b>width of connection bar maximum</b>                                          | 55 mm                                                                                                                                                                          |
| <b>wire length for thermistor connection</b>                                    |                                                                                                                                                                                |
| • with conductor cross-section = 0.5 mm² maximum                                | 50 m                                                                                                                                                                           |
| • with conductor cross-section = 1.5 mm² maximum                                | 150 m                                                                                                                                                                          |
| • with conductor cross-section = 2.5 mm² maximum                                | 250 m                                                                                                                                                                          |

|                                                                                      |                                                                                                                         |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>type of connectable conductor cross-sections</b>                                  |                                                                                                                         |
| • for DIN cable lug for main contacts stranded                                       | 2x (50 ... 240 mm <sup>2</sup> )                                                                                        |
| • for DIN cable lug for main contacts finely stranded                                | 2x (70 ... 240 mm <sup>2</sup> )                                                                                        |
| <b>type of connectable conductor cross-sections</b>                                  |                                                                                                                         |
| • for control circuit solid                                                          | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )                                                    |
| • for control circuit finely stranded with core end processing                       | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )                                                    |
| • for AWG cables for control circuit solid                                           | 1x (20 ... 12), 2x (20 ... 14)                                                                                          |
| <b>wire length</b>                                                                   |                                                                                                                         |
| • between soft starter and motor maximum                                             | 800 m                                                                                                                   |
| • at the digital inputs at DC maximum                                                | 1 000 m                                                                                                                 |
| <b>tightening torque</b>                                                             |                                                                                                                         |
| • for main contacts with screw-type terminals                                        | 20 ... 35 N·m                                                                                                           |
| • for auxiliary and control contacts with screw-type terminals                       | 0.8 ... 1.2 N·m                                                                                                         |
| <b>tightening torque [lbf·in]</b>                                                    |                                                                                                                         |
| • for main contacts with screw-type terminals                                        | 177 ... 310 lbf·in                                                                                                      |
| • for auxiliary and control contacts with screw-type terminals                       | 7 ... 10.3 lbf·in                                                                                                       |
| <b>Ambient conditions</b>                                                            |                                                                                                                         |
| installation altitude at height above sea level maximum                              | 5 000 m                                                                                                                 |
| <b>ambient temperature</b>                                                           |                                                                                                                         |
| • during operation                                                                   | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above                                               |
| • during storage and transport                                                       | -40 ... +80 °C                                                                                                          |
| <b>environmental category</b>                                                        |                                                                                                                         |
| • during operation according to IEC 60721                                            | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| • during storage according to IEC 60721                                              | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4                 |
| • during transport according to IEC 60721                                            | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)                                                                             |
| <b>Electromagnetic compatibility</b>                                                 |                                                                                                                         |
| <b>EMC emitted interference</b>                                                      | acc. to IEC 60947-4-2: Class A                                                                                          |
| <b>Communication/ Protocol</b>                                                       |                                                                                                                         |
| <b>communication module is supported</b>                                             |                                                                                                                         |
| • PROFINET standard                                                                  | Yes                                                                                                                     |
| • PROFINET high-feature                                                              | Yes                                                                                                                     |
| • EtherNet/IP                                                                        | Yes                                                                                                                     |
| • Modbus RTU                                                                         | Yes                                                                                                                     |
| • Modbus TCP                                                                         | Yes                                                                                                                     |
| • PROFIBUS                                                                           | Yes                                                                                                                     |
| <b>UL/CSA ratings</b>                                                                |                                                                                                                         |
| <b>manufacturer's article number</b>                                                 |                                                                                                                         |
| • of the fuse                                                                        |                                                                                                                         |
| — usable for Standard Faults up to 575/600 V according to UL                         | Type: Class J / L, max. 2000 A; Iq = 42 kA                                                                              |
| — usable for High Faults up to 575/600 V according to UL                             | Type: Class J / L, max. 2000 A; Iq = 100 kA                                                                             |
| — usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class J / L, max. 2000 A; Iq = 42 kA                                                                              |
| — usable for High Faults at inside-delta circuit up to 575/600 V according to UL     | Type: Class J / L, max. 2000 A; Iq = 100 kA                                                                             |
| <b>operating power [hp] for 3-phase motors</b>                                       |                                                                                                                         |
| • at 200/208 V at 50 °C rated value                                                  | 200 hp                                                                                                                  |
| • at 220/230 V at 50 °C rated value                                                  | 200 hp                                                                                                                  |
| • at 460/480 V at 50 °C rated value                                                  | 450 hp                                                                                                                  |
| • at 200/208 V at inside-delta circuit at 50 °C rated value                          | 350 hp                                                                                                                  |
| • at 220/230 V at inside-delta circuit at 50 °C rated value                          | 400 hp                                                                                                                  |
| • at 460/480 V at inside-delta circuit at 50 °C rated value                          | 850 hp                                                                                                                  |
| <b>contact rating of auxiliary contacts according to UL</b>                          | R300-B300                                                                                                               |
| <b>Electrical Safety</b>                                                             |                                                                                                                         |
| <b>protection class IP on the front according to IEC 60529</b>                       | IP00                                                                                                                    |
| <b>ATEX</b>                                                                          |                                                                                                                         |

|                                                                                                                                                        |                                                                                              |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX                                                                                   | SIL 1                                                                                        |
| PFHD with high demand rate according to IEC 61508 relating to ATEX                                                                                     | 5E-7 1/h                                                                                     |
| PFDavg with low demand rate according to IEC 61508 relating to ATEX                                                                                    | 0.008                                                                                        |
| hardware fault tolerance according to IEC 61508 relating to ATEX                                                                                       | 0                                                                                            |
| T1 value for proof test interval or service life according to IEC 61508 relating to ATEX                                                               | 3 a                                                                                          |
| certificate of suitability <ul style="list-style-type: none"> <li>• ATEX</li> <li>• IECEx</li> <li>• according to ATEX directive 2014/34/EU</li> </ul> | Yes<br>Yes<br>BVS 18 ATEX F 003 X                                                            |
| type of protection according to ATEX directive 2014/34/EU                                                                                              | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb] |

#### Approvals Certificates

|                                                            |         |
|------------------------------------------------------------|---------|
| Environmental Product Declaration                          |         |
| • global warming potential [CO2 eq] / during manufacturing | 306 kg  |
| • global warming potential [CO2 eq] / during sales         | 13.9 kg |
| • global warming potential [CO2 eq] / during operation     | 1610 kg |
| • global warming potential [CO2 eq] / after end of life    | -116 kg |
| • global warming potential [CO2 eq] / total                | 1820 kg |

|             |                          |
|-------------|--------------------------|
| Environment | General Product Approval |
|-------------|--------------------------|

[Environmental Confirmations](#)



|                          |     |                                |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMV | For use in hazardous locations |
|--------------------------|-----|--------------------------------|



|                   |                      |
|-------------------|----------------------|
| Test Certificates | Maritime application |
|-------------------|----------------------|

[Type Test Certificates/Test Report](#)



|       |
|-------|
| other |
|-------|

[Confirmation](#)



#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5552-6HA04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5552-6HA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5552-6HA04&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5552-6HA04&lang=en)


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5552-6HA04>


<https://curves.simaris.siemens.com/curves/3RW5552-6HA04>

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5552-6HA04/char>

[https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G\\_NSB0\\_XX\\_01704&showdetail=true&view=Search](https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G_NSB0_XX_01704&showdetail=true&view=Search)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

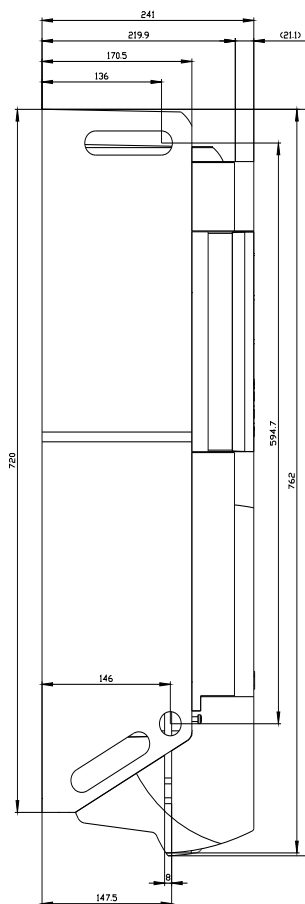

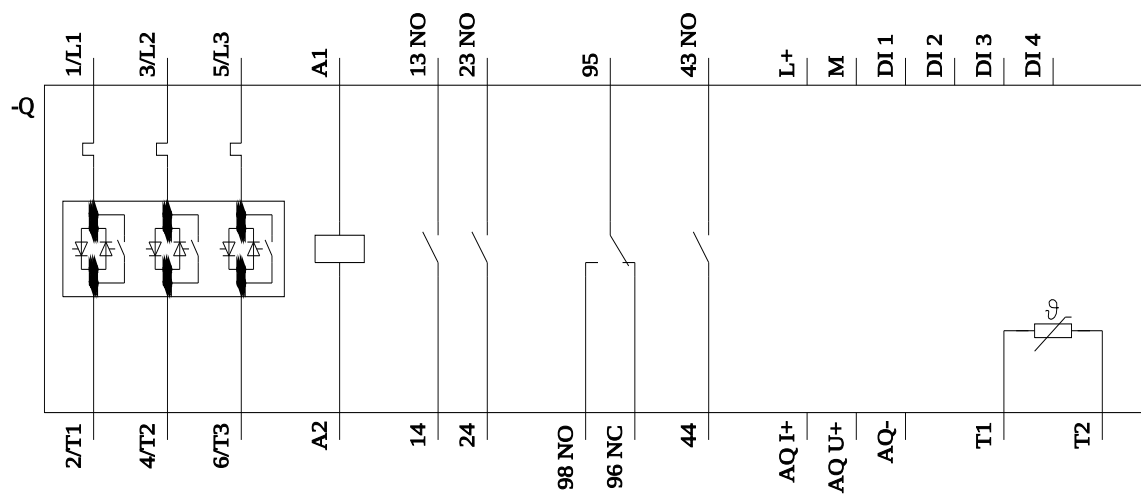

last modified:

9/5/2025

