
SIEMENS

Data sheet 3KD4840-0QE10-0

Switch disconnector 800 A, Size 4, 4-pole Front operating mechanism left Basic unit without handle flat terminal

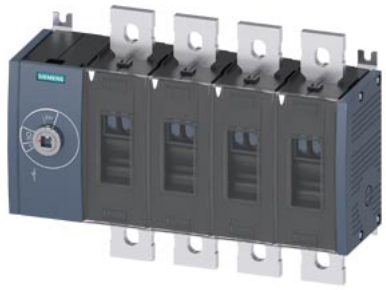

Model	
product brand name	SENTRON
product designation	3KD switch disconnector
design of the product	Switch
display version for switch position indicator door-coupling rotary operating mechanism	ON-OFF
design of the actuating element	Without handle
type of the driving mechanism	Front operating mechanism
type of the driving mechanism motor drive	No
General technical data	
number of poles	4
type of device	fixed mounting
size of switch disconnector	4
operational current at 35 °C rated value	800 A
mechanical service life (operating cycles) typical	8 000
electrical endurance (operating cycles)	
● at AC-23 A at 690 V	500
● at DC-23 A at 440 V	500
I2t value	
● with closed switch at 1000 V for combination switch +gG/aM SITOR fuse maximum	647 250 A²·s
● of the fuse at 500 V maximum permissible	10 400 005 A²·s
● of the gG/aM SITOR fuse at 1000 V maximum permissible	520 000 A²·s
● of the molded case circuit breaker at 415 V maximum permissible	16 000 000 A²·s
position of the switch operating mechanism	at the left end
overvoltage in percent relative to the operating voltage at AC at 400, 500, 690 V at 50/60 Hz	10 %
overvoltage category	IV
degree of pollution	3
Voltage	
operating voltage with current paths in series	
● with degree of pollution 2 at DC rated value	440 V / 3
● with degree of pollution 3 at DC rated value	440 V / 3
insulation voltage	
● rated value	1 000 V
surge voltage resistance rated value	12 kV
operational current rated value	800 A

Subject to change without notice
© Copyright Siemens

• operational current	
— at 35 °C rated value	800 A
— at 40 °C rated value	800 A
— at 45 °C rated value	800 A
— at 50 °C rated value	800 A
— at 55 °C rated value	800 A
— at 60 °C rated value	630 A
— at 65 °C rated value	630 A
— at 70 °C rated value	630 A
• operational current	
— at AC-23 A at 690 V rated value	800 A
— at AC-23 A at 500 V rated value	800 A
— at AC-23 A at 400 V rated value	800 A
— at AC-22 A at 1000 V maximum	800 A
— at AC-22 A at 690 V rated value	800 A
— at AC-22 A at 500 V rated value	800 A
— at AC-22 A at 400 V rated value	800 A
— at AC-20 A at 1000 V maximum	800 A
— at AC-21 A at 500 V rated value	800 A
— at AC-21 A at 690 V rated value	800 A
continuous current of upstream fuse at 500 V and 690 V rated value	1 000 A
continuous current of upstream fuse at 1000 V rated value	1 000 A
continuous current of upstream molded case circuit breaker at 415 V rated value	1 000 A
let-through current of the fuse at 500 V maximum permissible	118 000 A
let-through current of the gG fuse at 690 V maximum permissible	90 600 A
Supply voltage	
operating voltage at AC rated value	1 000 V
Protection class	
protection class IP	IP00
protection class IP	
• with closed switch with cover or cable lug cover	IP20
• on the front	IP00
Dissipation	
power loss [W]	
• with conventional rated thermal current per pole	25 W
• with conventional rated thermal current per device	100 W
• for rated value of the current at AC in hot operating state per pole	25 W
Main circuit	
operating power	
• at AC-23 A at 500 V rated value	560 kW
operational current rated value	800 A
Auxiliary circuit	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	0
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	8
number of NO contacts for auxiliary contacts	8
Suitability	
suitability for use main switch	Yes
suitability for use switch disconnector	Yes
suitability for use EMERGENCY OFF switch	Yes
suitability for use according to IEC 62626-1 safety switch	No
suitability for use maintenance/repair switch	Yes
Product details	

Subject to change without notice
© Copyright Siemens

product feature interlock	No
product component	
● **trip indicator**	No
● voltage trigger	No
● undervoltage release	No
● undervoltage release with leading contact	No
product extension auxiliary switch	Yes
product extension optional motor drive	No
product extension optional voltage trigger	No
Short circuit	
short-time withstand current (Icw) at 1000 V AC/440 V DC limited to 1 s rated value	30 kA
short-circuit current making capacity (Icm) for switch disconnector	
● **at 1000 V AC without fuse link rated value minimum**	80 kA
● **at DC 440 V without fuse link rated value minimum**	42.6 kA
● **without fuse link rated value minimum**	80 kA
conditional short-circuit current with line-side fuse protection	
● **at 415 V by molded case circuit breaker rated value**	65 kA
● **at 500 V by gG fuse rated value**	100 kA
● **at 690 V by gG fuse rated value**	100 kA
Connections	
type of connectable conductor cross-sections for aluminum conductor	
● stranded with lug	1x (25 ... 240 mm²), 2x (25 ... 240 mm²)
type of connectable conductor cross-sections	
● with combination of Al conductor+switch	620 A / 2 x 240 mm²
● for copper busbar	'1 x (40 x 10 mm²), 2 x (40 x 5 mm²)
type of connectable conductor cross-sections for copper conductor	
● stranded with lug according to DIN 46234	1x (25 ... 240 mm²), 2x (25 ... 240 mm²)
● stranded with lug according to DIN 46235	1x (25 ... 240 mm²), 2x (25 ... 240 mm²)
type of electrical connection for main current circuit	flat connector
Mechanical Design	
height	235 mm
width	320 mm
depth	110 mm
fastening method	screw fixing
fastening method	
● 4-hole front mounting	No
● front mounting with central attachment	No
● rail mounting	No
mounting position	any
Net Weight	9.18 kg
Environmental conditions	
ambient temperature during operation	
● minimum	-25 °C
● maximum	70 °C
ambient temperature during storage	
● minimum	-50 °C
● maximum	80 °C
Certificates	
reference code according to IEC 81346-2	Q
Approvals Certificates	

Environment	General Product Approval

Subject to change without notice
© Copyright Siemens

Environmental Confirmations | Environmental Confirmations | Miscellaneous


General Product Approval		Test Certificates	Maritime application	
Confirmation		Type Test Certificates/Test Report		


other		
Confirmation		Miscellaneous

Further information


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD4840-0QE10-0
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3KD4840-0QE10-0
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD4840-0QE10-0
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/3KD4840-0QE10-0

Subject to change without notice
© Copyright Siemens

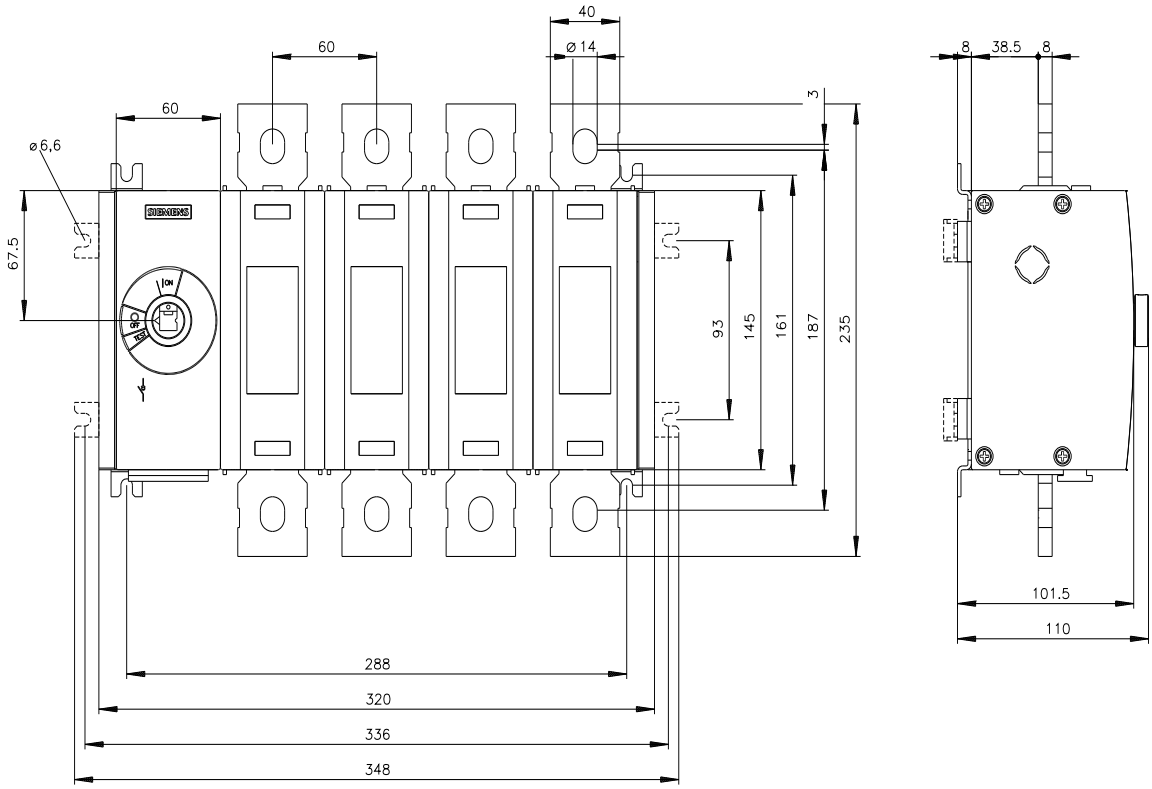

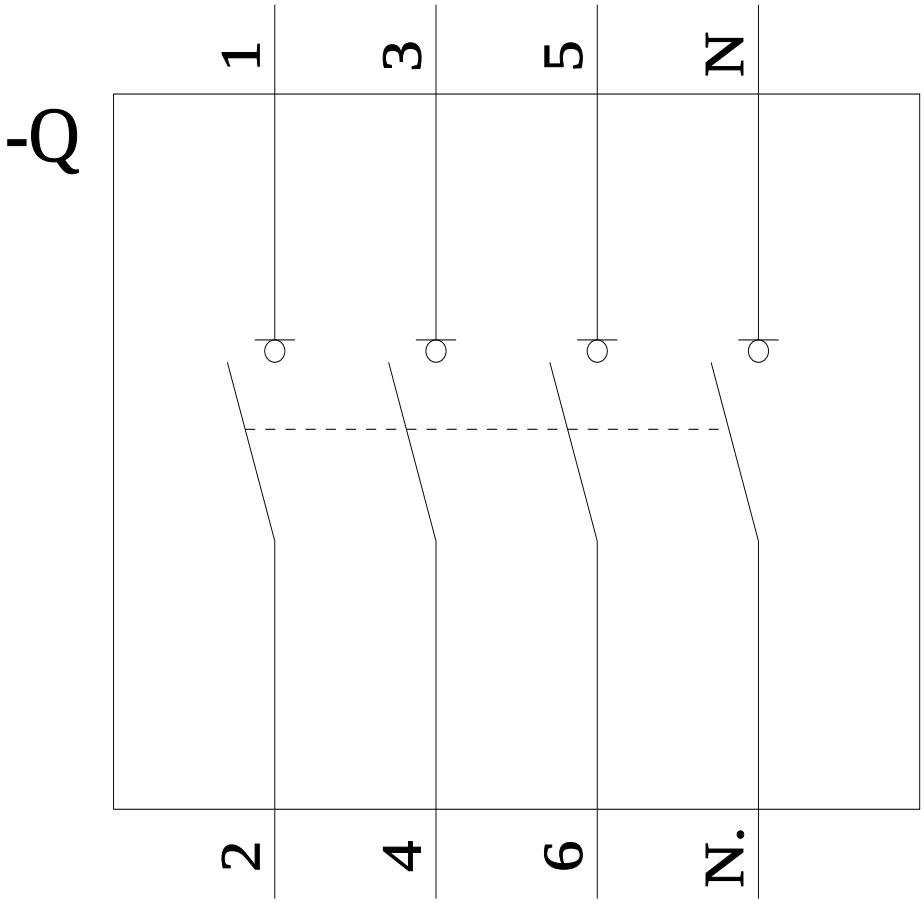

Subject to change without notice
© Copyright Siemens

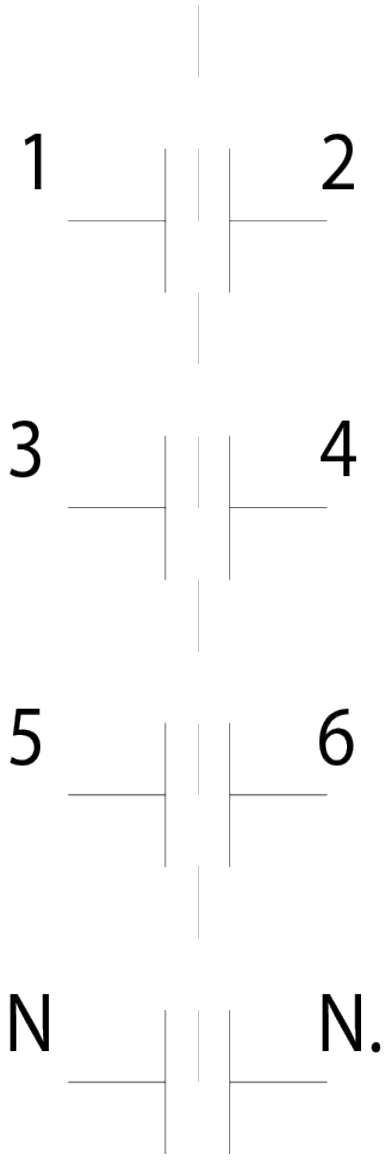

last modified: 7/9/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens