SIEMENS

Data sheet 8US1923-3AA01



busbar system, accessory busbar center-to-center spacing 60 mm busbar support 3-pole for busbars 12x 5 (10)-30x 5 -10 internal fixing width: 20 mm

Model	
product brand name	SENTRON
product designation	Busbar support
operating voltage at AC rated value	690 V
suitability for use	Flat bars
type of connectable conductor cross-sections for copper conductor stranded	12 mm x 5 mm - 30 mm x 10 mm
Mechanical Design	
width	20 mm
busbar center-to-center spacing	60 mm
Net Weight	148 g

Approvals Certificates

Environment		General Product Approval			
Environmental Confirmations	Environmental Confirmations	cURus	UR	EAC	Confirmation


General Product Approval		Test Certificates	other		
CE EG-Konf.	UKCA	Miscellaneous	Confirmation	Miscellaneous	产品合格 QC PASS

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1923-3AA01
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1923-3AA01
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1923-3AA01
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications

Subject to change without notice
© Copyright Siemens

Kennlinien
https://curves.simaris.siemens.com/curves/8US1923-3AA01

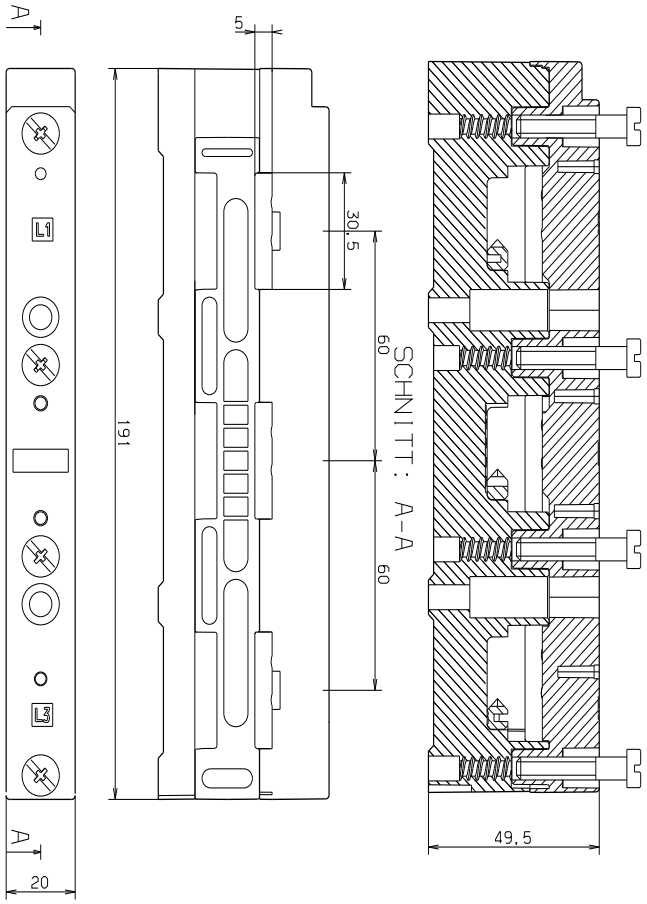

last modified: 6/1/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens