SIEMENS

Data sheet 3RK1105-1AE04-0CA0



Figure similar

ASIsafe Basis Safety monitor 1 F-RO 1 enabling circuit IP20, with screw terminal removable terminals Safe output relay Response time maximum 40 ms Monitor type 1, Version 3 Can be used up to Category 4 (EN954-1) up to PL E (EN ISO 13849-1) up to SIL 3 (IEC 61508)

General technical data		
design of the product		safety monitor
protocol is supported AS-Interface protocol		Yes
number of release circuits		1
type of electrical connection of the inputs and outputs		screw terminal
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		A
reference code according to EN 61346-2		F
Ambient conditions		
ambient temperature		
• during operation	°C	-20 ... +60
• during storage	°C	-30 ... +70
protection class IP		IP20
Mechanical data		
width	mm	45
height	mm	108
depth	mm	120
fastening method		screws / DIN rail

Certificates/ approvals

General Product Approval					EMV
UL	cULus	EAC	CE EG-Konf.	UKCA	KC

EMV	Functional Saftey	other		Environment
RCM	Type Examination Certificate	Confirmation	产品合格 QC PASS	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)

Subject to change without notice
© Copyright Siemens


https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1105-1AE04-0CA0

Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1105-1AE04-0CA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK1105-1AE04-0CA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1105-1AE04-0CA0&lang=en

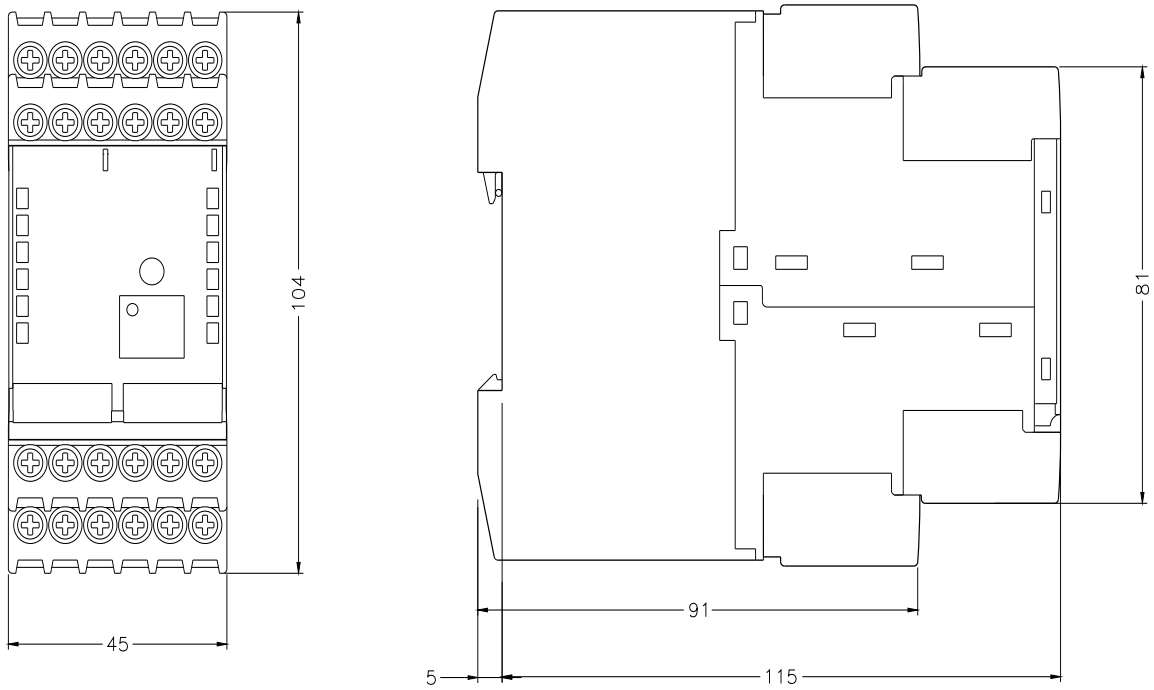

last modified: 4/1/2025

Subject to change without notice
© Copyright Siemens