SIEMENS

Data sheet 5SV8000-6KK

Siemens EcoTech

Differential current monitoring device analog, Type A IDN 0.03A 5A 0.02 5 sec.



Model	
product brand name	SENTRON
product designation	residual current monitor
design of the product	Analog, type A
adjustable response delay time	
● initial value	0.02 s
● full-scale value	5 s
frequency of the measuring circuit rated value	
● minimum	50 Hz
● maximum	60 Hz
protection class IP at connection all terminals	IP20
type of connectable summation current transformer	5SV8700-0KK, 5SV8701-0KK, 5SV8702-0KK, 5SV8703-0KK, 5SV8704-0KK, 5SV8705-0KK, 5SV8706-0KK
overvoltage category	III
degree of pollution	2
type of voltage of the operating voltage for actuation	AC
operating voltage	
● rated value minimum	184 V
● rated value maximum	276 V
● at AC rated value	230 V
protection class IP on the front	IP41
Dissipation	
power loss [V·A] maximum	3 V·A
Main circuit	
operating frequency rated value	
● minimum	50 Hz
● maximum	60 Hz
Auxiliary circuit	
number of CO contacts for auxiliary contacts	1
Relay contacts	
switching voltage of relay contacts rated value	230 V
switching current of relay contacts rated value	6 A
Product function	
product function	
● residual current display	No
● error memory	Yes

Subject to change without notice
© Copyright Siemens

● communication function	No
Connections	
product component removable terminal for main circuit	No
product component removable terminal for auxiliary and control circuit	No
wire length to the summation current transformer	10 m
stripped length	10 mm
connectable conductor cross-section for flexible conductor	
● minimum	0.14 mm²
● maximum	2.5 mm²
connectable conductor cross-section for rigid conductor	
● minimum	0.14 mm²
● maximum	2.5 mm²
tightening torque with screw-type terminals	
● minimum	0.5 N·m
● maximum	0.6 N·m
type of connectable conductor cross-sections for AWG cables for supply voltage	AWG 25 ... AWG 14
type of electrical connection	screw terminal
Mechanical Design	
height	85 mm
width	36 mm
depth	68 mm
fastening method	DIN-rail mounting
Net Weight	187 g
Environmental conditions	
influence of the surrounding temperature	Max. 95% humidity
ambient temperature during operation	
● minimum	-10 °C
● maximum	50 °C
ambient temperature during storage	
● minimum	-20 °C
● maximum	70 °C
Certificates	
reference code according to IEC 81346-2	K

Approvals Certificates

Environment		General Product Approval		
Environmental Confirmations	Siemens EcoTech	Environmental Confirmations	EAC	Confirmation


General Product Approval	other
UKCA	产品合格 QC PASS — Confirmation

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SV8000-6KK
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/5SV8000-6KK

© Copyright Siemens

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV8000-6KK
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/5SV8000-6KK

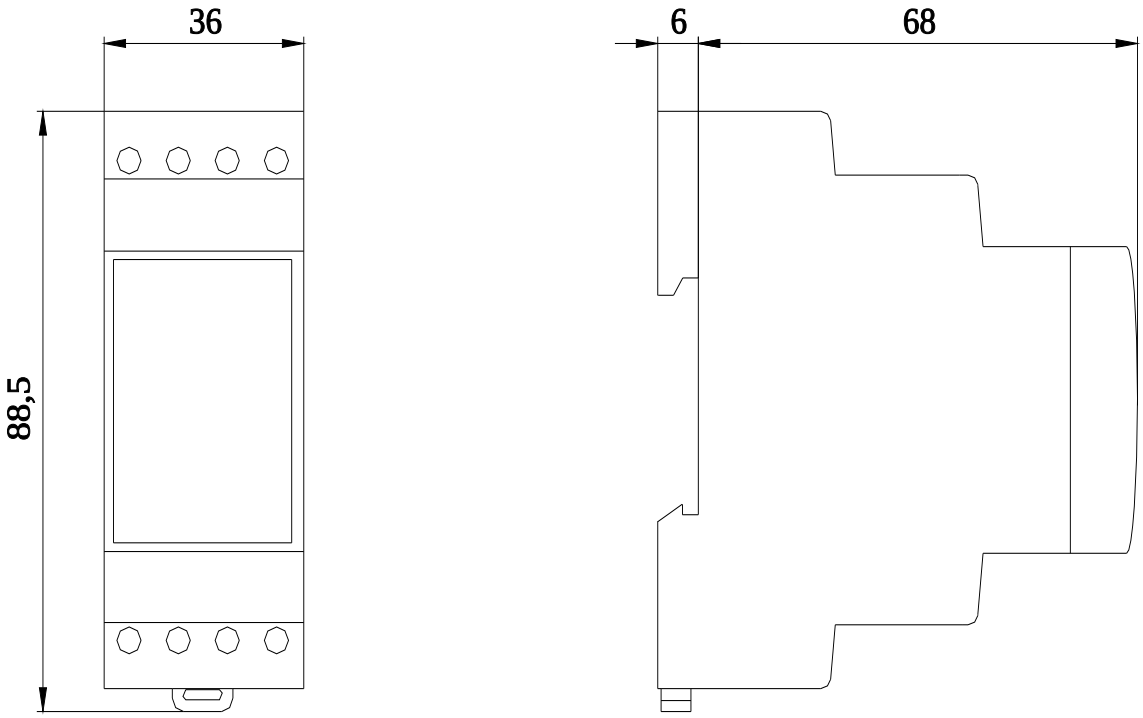

last modified: 10/22/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens