SIEMENS

Data sheet 8US1261-5FM08



busbar system busbar center-to-center spacing 60 mm device adapter, width: 55 mm busbar thickness: 5.10 mm+TT profile for contactor with overload relay 3R, S2 with 1 mounting rail 35 mm, up to 56 A length 182 mm

Model	
product brand name	SENTRON
product designation	Device adapter
design of the product	Accessories
number of mounting rails	1
Mechanical Design	
height	200 mm
width of the adapter	63 mm
depth	63 mm
thickness of the busbar	
• minimum	5 mm
• maximum	10 mm
busbar center-to-center spacing	60 mm
Net Weight	238 g

Approvals Certificates

Environment		General Product Approval			
Environmental Confirmations	Environmental Confirmations	cURus	EAC	Confirmation	CE EG-Konf.


General Product Approval	Test Certificates	Maritime application	other		
UKCA	Miscellaneous	BUREAU VERITAS	Confirmation	产品合格 QC PASS	Miscellaneous

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1261-5FM08
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1261-5FM08
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

Subject to change without notice
© Copyright Siemens

https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1261-5FM08
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/8US1261-5FM08

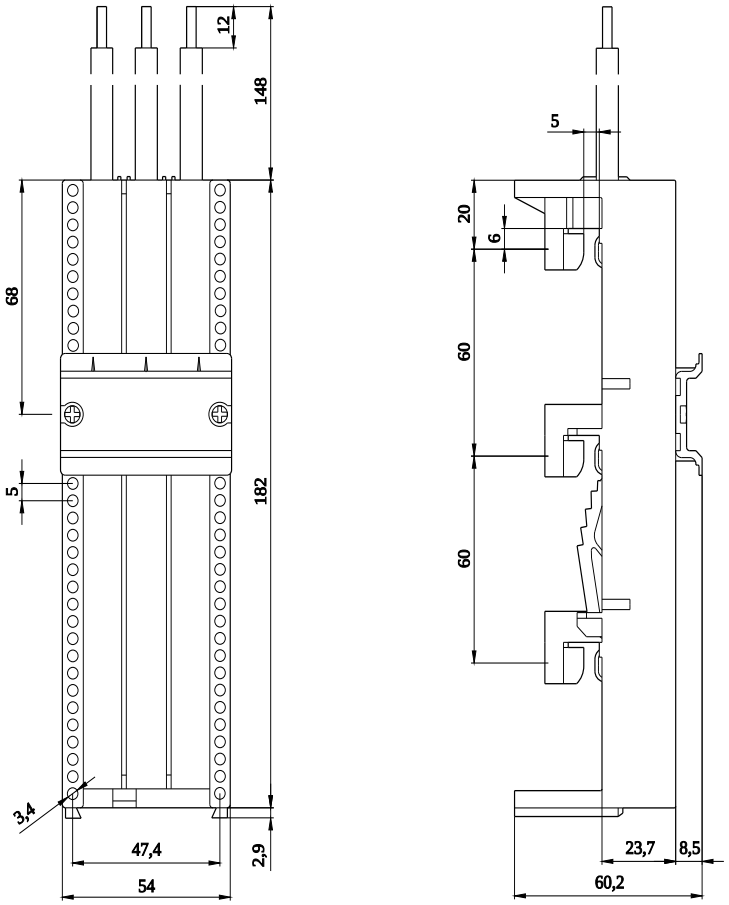

last modified: 4/11/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens