SIEMENS

Data sheet 3RK1408-8SQ00-0AA3



AS-i data coupler K60 digital 4 DI/4 DQ, virtual, IP67 module occupies 2 addresses
Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data	
design of the product	AS-Interface data coupler
design of the device type	standard slave
Inputs	
number of digital inputs	4
Outputs	
number of digital outputs	4
Ambient conditions	
ambient temperature	
● during operation	-25 ... +85 °C
● during storage	-40 ... +85 °C
protection class IP	IP67
Mechanical data	
width	60 mm
height	152 mm
depth	29 mm
fastening method	standard rail mounting/wall mounting using mounting plate for K60 compact module
shock resistance	15 g / 11 ms

Certificates/ approvals

General Product Approval	EMV	Maritime application

other	Environment
Confirmation	Environmental Con-firmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)

Subject to change without notice
© Copyright Siemens


https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1408-8SQ00-0AA3

Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1408-8SQ00-0AA3

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RK1408-8SQ00-0AA3

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1408-8SQ00-0AA3&lang=en

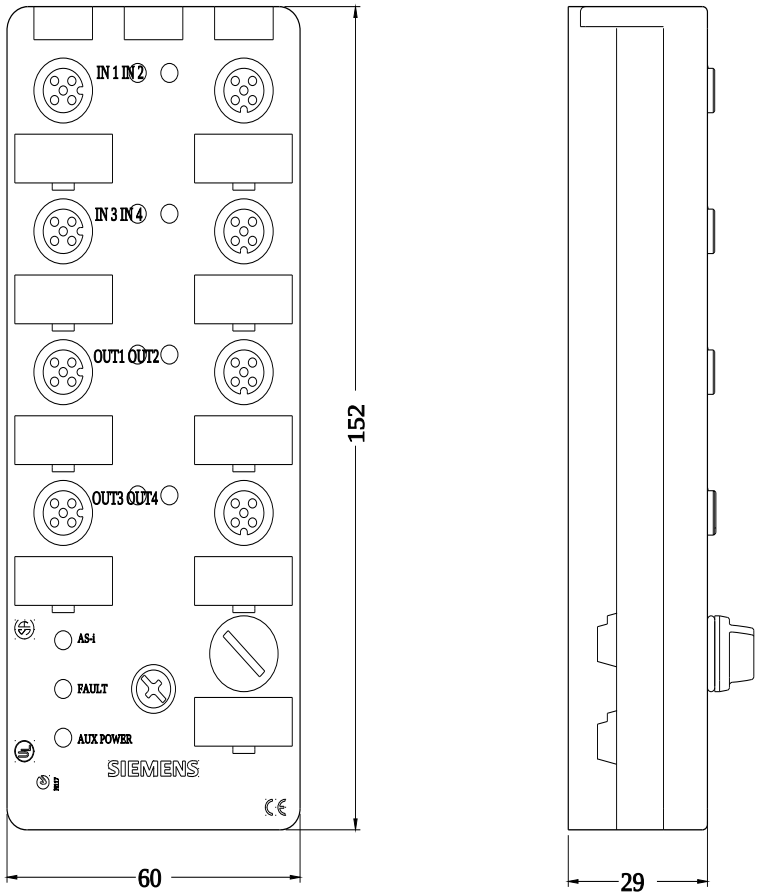

last modified: 4/4/2026

© Copyright Siemens