SIEMENS

Data sheet 3NE4330-6B



Figure similar

SITOR fuse link, with female thread on both sides, In: 315 A, aR, Un AC: 800 V, Un DC: 440 V, front indicator

Model	
product brand name	SENTRON
product designation	SITOR fuse link
design of the product	With female thread on both sides
design of an identification indicator	front indicator
design of the switching contact	with female thread at both ends for SITOR 6QG12 thyristor sets
design of the fuse link	Fuses for special applications
General technical data	
size of fuse system according to EN 60269-1	others
operating class of the fuse link	aR
varying load factor (WL)	0.85
type of voltage of the operating voltage	AC/DC
operating voltage at AC according to UL rated value	800 V
Supply voltage	
supply voltage	
● at AC	800 V
● at DC	440 V
Breaking Capacity	
switching capacity current	
● according to IEC 60947-2 rated value	100 kA
Dissipation	
power loss [W]	120 W
power loss [W]	
● for rated value of the current at AC in hot operating state per pole	120 W
● maximum	120 W
Product details	
product description	with female thread on both sides, silver-plated
accessories included	no
Mechanical Design	
mounting position	Any, preferably vertical
Net Weight	690 g
Environmental conditions	
ambient temperature during operation	
● minimum	-20 °C
● maximum	50 °C
environmental category	-20 to +50 at 95% relative humidity
Approvals Certificates	


Subject to change without notice
© Copyright Siemens

Environment			General Product Approval		
Environmental Confirmations		Environmental Confirmations		Confirmation	

General Product Approval	Test Certificates	other		
	Special Test Certificate	Miscellaneous	Confirmation	

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NE4330-6B
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3NE4330-6B
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NE4330-6B
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/3NE4330-6B

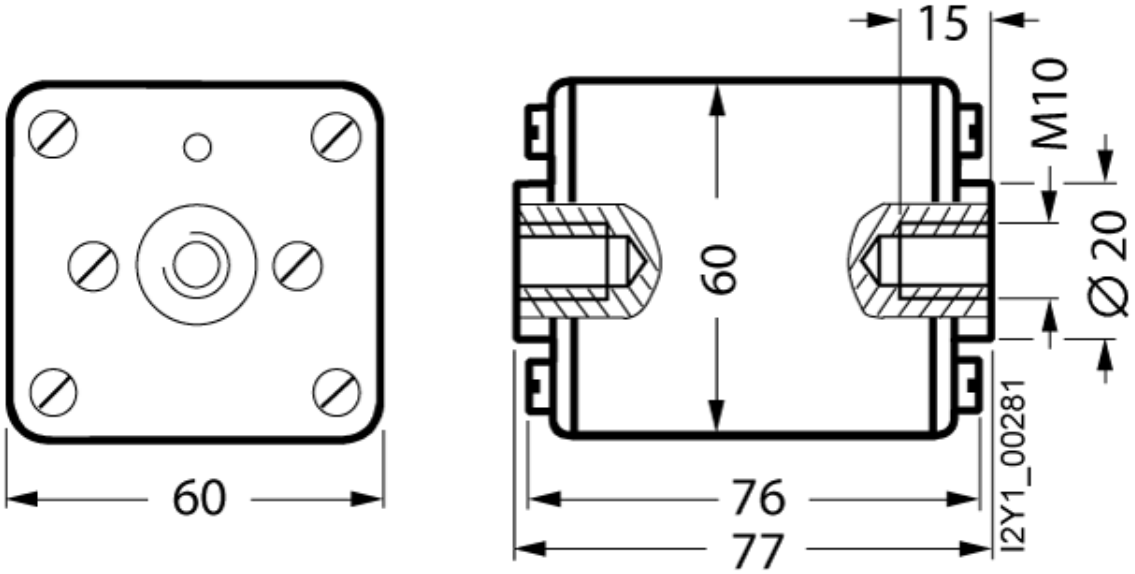

last modified: 4/11/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens