

## Data sheet for SIMOTICS S-1FL2

Article No. : 1FL2304-2AF11-1MB0

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :



### Basic motor data

|                         |                                                     |
|-------------------------|-----------------------------------------------------|
| Motor type              | Permanent-magnet synchronous motor, Natural cooling |
| Motor type              | High Inertia                                        |
| Static torque           | 1.45 Nm                                             |
| Static current          | 1.30 A                                              |
| Maximum torque          | 4.45 Nm                                             |
| Maximum current         | 4.20 A                                              |
| Maximum speed           | 4,000 rpm                                           |
| Rotor moment of inertia | 3.0500 kgcm <sup>2</sup>                            |
| Weight                  | 4.90 kg                                             |

### Rated data

SINAMICS S200, 3 AC 380 ... 480 V

|               |           |
|---------------|-----------|
| Rated speed   | 3,000 rpm |
| Rated torque  | 1.27 Nm   |
| Rated current | 1.20 A    |
| Rated power   | 0.40 kW   |

### Encoder system


|                |                                                       |
|----------------|-------------------------------------------------------|
| Encoder system | Absolute encoder 21-bit singleturn + 12-bit multiturn |
|----------------|-------------------------------------------------------|

### Motor connection

|                 |                         |
|-----------------|-------------------------|
| Connection type | Metal angular connector |
|-----------------|-------------------------|

### Mechanical data

|                               |                                              |
|-------------------------------|----------------------------------------------|
| Design acc. to Code I         | IM B5 (IM V1, IM V3)                         |
| Vibration severity grade      | Grade A                                      |
| Shaft height                  | 45                                           |
| Flange size (AB)              | 90 mm                                        |
| Centering ring (N)            | 80 mm                                        |
| Hole circle (M)               | 100 mm                                       |
| Screw-on hole (S)             | 6.7 mm                                       |
| Overall length (LB)           | 203.5 mm                                     |
| Diameter of shaft (D)         | 19 mm                                        |
| Length of shaft (E)           | 35 mm                                        |
| Length of flange diagonal (P) | 116 mm                                       |
| Shaft end                     | Shaft with parallel key (half-key balancing) |
| Color of the housing          | Anthracite RAL 7016                          |

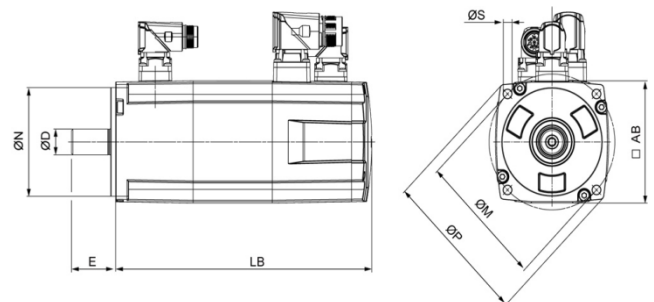

### Holding brake

|                          |              |
|--------------------------|--------------|
| Rated voltage            | 24 V DC 10 % |
| Rated current            | 0.90 A       |
| Holding torque $M_{4Br}$ | 3.50 Nm      |
| Opening time             | 60 ms        |
| Closing time             | 45 ms        |