SIEMENS

Data sheet 8US1903-3AB00

busbar system, accessory busbar center-to-center spacing 40 mm busbar support 3-pole 12x 5, 2x12x 5.15x 5, 2x15x 5 as end and intermediate holder incl. inlay components for busbar thickness 5 mm and incl. end covers



Figure similar

Model	
product brand name	SENTRON
product designation	Busbar support
operating voltage at AC rated value	690 V
type of connectable conductor cross-sections for copper conductor stranded	12 mm x 5 mm - 15 mm x 10 mm
Mechanical Design	
busbar center-to-center spacing	40 mm
Net Weight	177 g

Approvals Certificates


Environment		General Product Approval			
Environmental Confirmations	Environmental Confirmations	EAC	Confirmation	CE EG-Konf.	UKCA

Test Certificates	other		
Miscellaneous	Confirmation	产品合格 QC PASS	Miscellaneous

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1903-3AB00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8US1903-3AB00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1903-3AB00
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien

Subject to change without notice
© Copyright Siemens

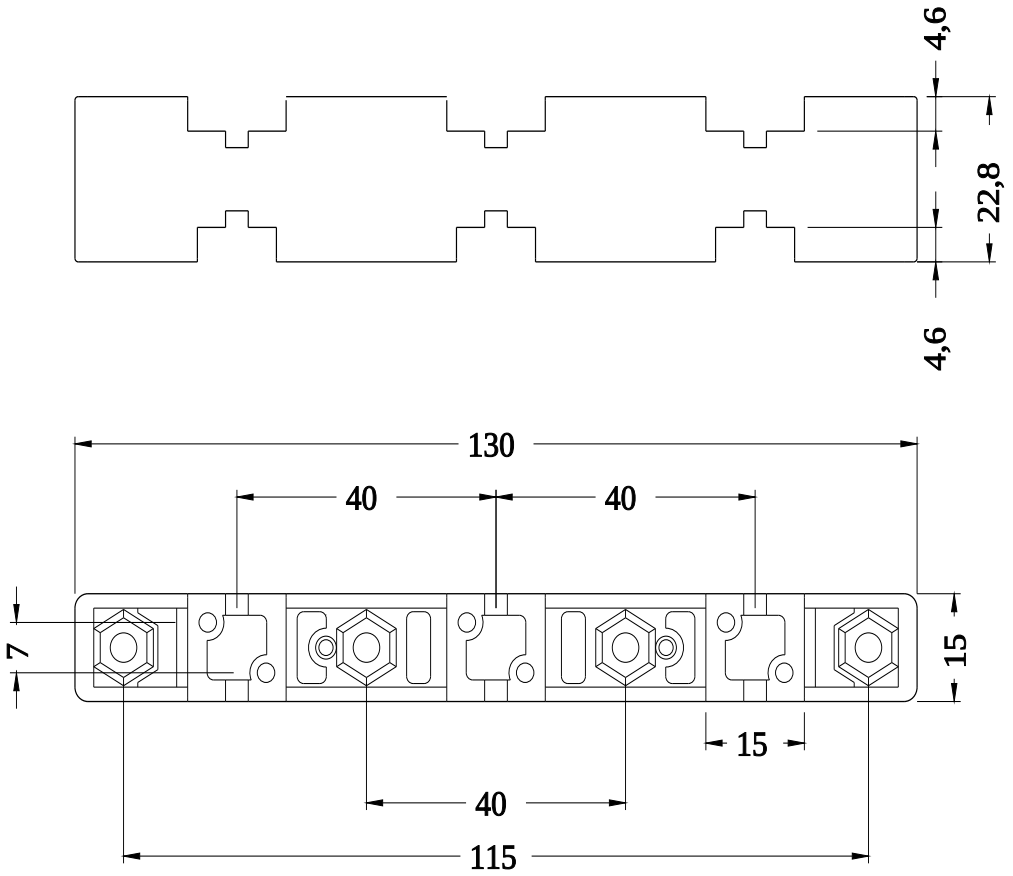

last modified: 6/1/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens