

NP-6111-CAN2

- Fanless, Low power consumption
- 2 x CAN Bus 2.0 A/B

■ Features


- 2 x Intel GbE LAN controller
- 4 x USB on the front, 1 x USB2.0 on board for USB dongle
- 2 x RS232/485, RS485 support auto flow control
- 2 x CAN Bus 2.0A/B
- DC12~24V Power supply with overcurrent, overvoltage and polarity inverse protection
- Support wall-mounted or DIN-Rail fixing style
- Fully enclosed structure, fanless design
- Wide operating temperature -20 ~ 60°C supported




■ Specifications

Model Name		NP-6111-CAN2-J1900	NP-6111-CAN2-J6412	NP-6111-CAN2-N305	NP-6111-CAN2-N97	
System	CPU	Intel® Celeron J1900, 2.0GHz, 4 cores/4 threads, 2MB L2 cache	Intel® Celeron J6412, 2.0~2.6GHz, 4 cores/4 threads, 1.5MB L2 cache	ntel® Core i3-N305,8 cores/8 threads, 6M Intel® Smart Cache, up to 3.8GHz	Intel® Processor N97,4 cores,6MB Intel® Smart Cache, up to 3.6GHz	
	TDP	10W			15W	12W
	BIOS	AMI UEFI BIOS				
	Memory	1 x SO-DIMM DDR3L-1333MHz (max. 8GB)	1 x SO-DIMM DDR4-2400MHz (max. 16GB)	1 x SO-DIMM DDR5-4800MHz (max. 16GB)		
	Storage	1 x mSATA bay				
	USB	1 x USB3.0, 3 x USB2.0	2 x USB3.0, 2 x USB2.0			
		1 x USB2.0 Type A on the board for USB dongle				
	COM	2 x COM(DB-9), selectable to support RS232 or RS485 mode by the switch,RS485 support auto flow control, (ESD protection for RS232: Air gap ±8KV, Contact ±6KV)				
	Ethernet	2 x Intel GbE LAN controller				
	DVI-D	Support up to 1920 x 1080 @ 60Hz				
	CAN Bus	2 x CAN Bus 2.0 A/B				
	Watch Dog	1~255 levels programmable				
OS Support	Microsoft Windows	Windows 10 IoT				
	Linux	Ubuntu, CentOS, Debian				
Power	Voltage Input	DC12~24V ±10%, overcurrent, overvoltage and polarity inverse protection				
	Power Consumption	Max. 60W				
Chassis	Structure	Aluminum-magnesium alloy box, Fanless, Wall-mounted or DIN-Rail				
	Dimensions	(L)200mm x (W)154.5mm x (H)74.6mm				
	Net Weight	1.8Kg				
Environment	Work Temperature	-20°C ~ 60°C (-4°F~140°F) with air flow (SSD)				
	Storage Temperature	-40°C ~ 80°C (-40°F ~ 176°F) with air flow (SSD)				
	Relative Humidity	5~95% (Non-condensing)				
	Operating Vibration	5~500Hz, 1.5Grms@with SSD, Follow IEC60068-2-64				
	Operating Shock	20G peak acceleration(11ms duration) with SSD, Follow IEC60068-2-27				
	EMC	CE/FCC Class A				

■ Dimensions (Unit: mm)

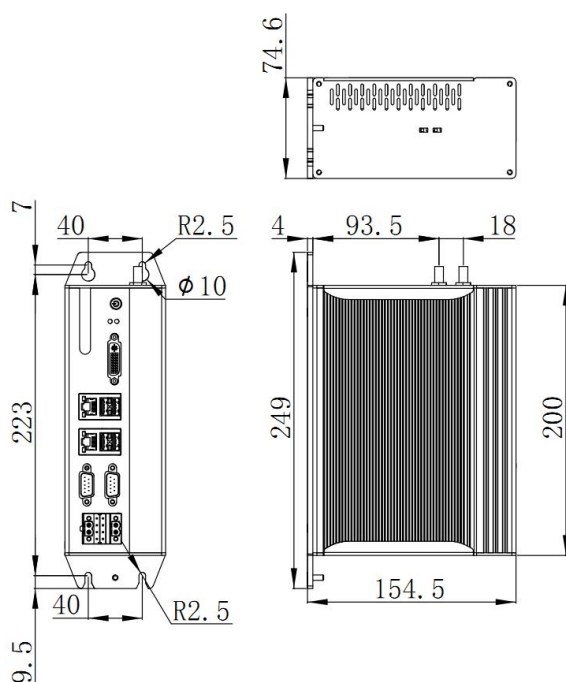

■ Interfaces

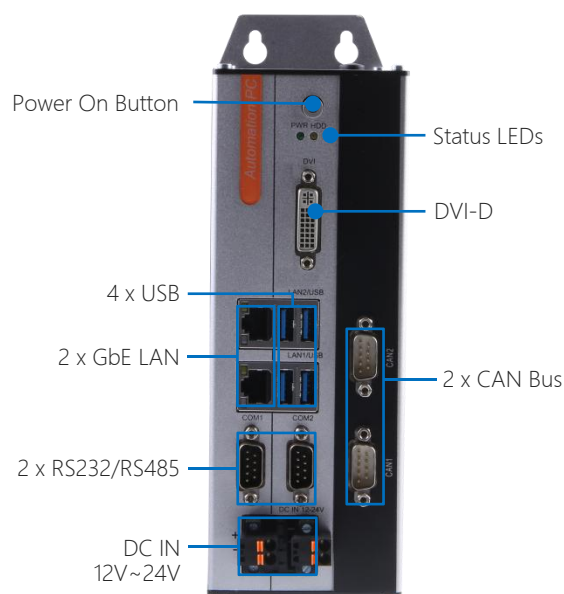

■ Ordering Information

Part No.	Product	Description
B73.61110.0C.0001	NP-6111-CAN2-J1900	CPU:J1900, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable), 2 x LAN, 1 x USB3.0, 3 x USB2.0, 2 x CAN2.0A/B Bus, DVI-D, DC12~24V Power input
B73.61110.0C.0008	NP-6111-CAN2-J6412	CPU:J6412, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable), 2 x LAN, 2 x USB3.0, 2 x USB2.0, 2 x CAN2.0A/B Bus, DVI-D, DC12~24V Power input
B73.61110.0C.0009	NP-6111-CAN2-N305	CPU:N305, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable), 2 x LAN, 2 x USB3.0, 2 x USB2.0, 2 x CAN2.0A/B Bus, DVI-D, DC12~24V Power input
B73.61110.0C.0010	NP-6111-CAN2-N97	CPU:N97, RAM:NULL, mSATA: NULL, 2 x COM(RS232/485 selectable), 2 x LAN, 2 x USB3.0, 2 x USB2.0, 2 x CAN2.0A/B Bus, DVI-D, DC12~24V Power input

■ Options

Parts	Description
DDR3L Memory	DDR3L-1333MHz: 4GB, 8GB
DDR4 Memory	DDR4-2400MHz: 4GB, 8GB, 16GB
DDR5 Memory	DDR5-4800MHz: 8GB, 16GB
mSATA SSD	64GB, 128GB, 256GB, 512GB, 1TB
Mount Option	DIN-Rail

Note: If some optional parts are offered with the system, additional system certificates may be required in certain regions/countries. Please contact NODKA for certificate compliance.