SIEMENS

Data sheet 4NC5325-0CE21



current transformer 400/1 A, 5 VA, Cl. 1.0

Model	
product brand name	SENTRON
product designation	Current transformer
design of the product	Bushing-type current transformers
product quality calibrated	No
size of the current transformer	3
operating apparent power rated value	5 V·A
operating voltage	0.72 kV
insulation voltage rated value	3 kV
designation of overcurrent limiting factor	FS 5
operational current rated value maximum	480 A
current	
● **at input rated value**	400 A
● **at output rated value**	1 A
accuracy class of the current transformer	class 1
value range of the operating frequency	50/60 Hz
Protection class	
protection class IP	IP20
suitability for use for outside use	No
suitability for use for interior use	Yes
product feature touch protection	Yes
Short circuit	
formula for rated short-time thermal current (Ith) for 1 s according to IEC 61869-2	60 x Ipr
formula for rated dynamic current (Idyn) according to IEC 61869-2	2.5 x Ith or 150 x Ipr
Connections	
type of electrical connection at output	screw-type terminals
Mechanical Design	
height of the opening	21 mm
width	83 mm
width of the push-through bus bar	
● at 1 bus bar maximum	51 mm
● in case of 2 bus bars maximum	41 mm
depth	77 mm
fastening method	screw fixing
diameter of inlet opening	36 mm
outer diameter of the push-through conductor maximum	36 mm
Net Weight	576 g

Subject to change without notice
© Copyright Siemens

Environmental conditions	
ambient temperature during operation	
● minimum	-30 °C
● maximum	55 °C
ambient temperature during storage	
● minimum	-30 °C
● maximum	70 °C

Approvals Certificates


Environment	General Product Approval			
Environmental Confirmations	EPD	EAC	Confirmation	CE EG-Konf. UKCA

other	
产品合格 QC PASS	Confirmation

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=4NC5325-0CE21
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/4NC5325-0CE21
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4NC5325-0CE21
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/4NC5325-0CE21

Subject to change without notice
© Copyright Siemens

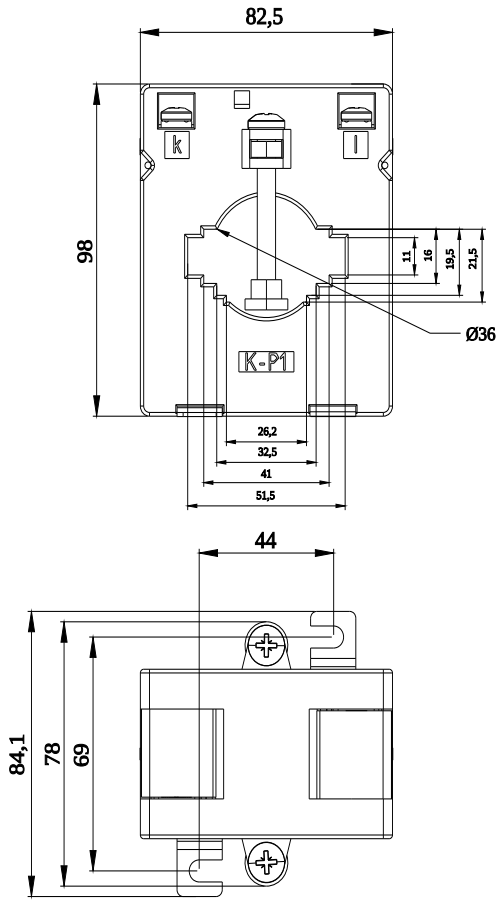

last modified: 3/21/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens