SIEMENS

Data sheet 3RX9310-0AA00

Notice: Phase-out type AS-Interface power supply unit IP20 30 V DC, 2.4 A with integrated ground fault detection

Safety related data		
protection class IP		IP20
Ambient conditions		
ambient temperature		
● during operation	°C	-25 ... +55
● during storage	°C	-25 ... +60
fastening method		fixing on standard mounting rail DIN EN 50 022-35 x 7.5 mm snap-on
width	mm	92
height	mm	110
depth	mm	136

Certificates/ approvals


Environment	General Product Approval	other
Environmental Confirmations	EAC	Confirmation



Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RX9310-0AA00
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9310-0AA00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RX9310-0AA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9310-0AA00&lang=en

Subject to change without notice
© Copyright Siemens

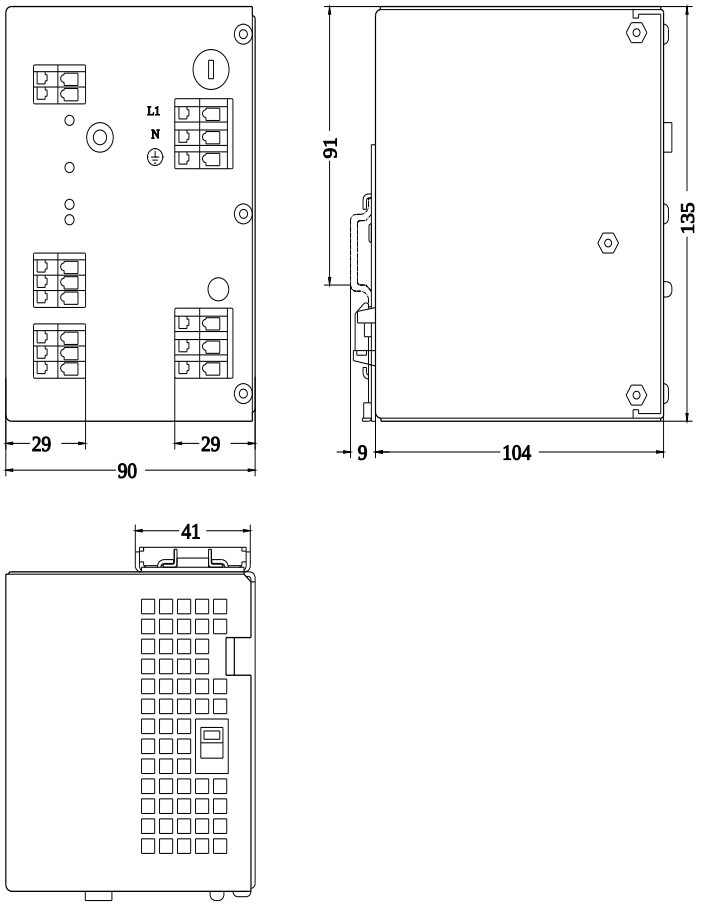

last modified: 4/4/2026

Subject to change without notice
© Copyright Siemens