
SIEMENS

Data sheet 6ES7400-2JA10-0AA0

SIMATIC S7-400, rack aluminum UR2-H, central and distributed with 2 x 9 slots

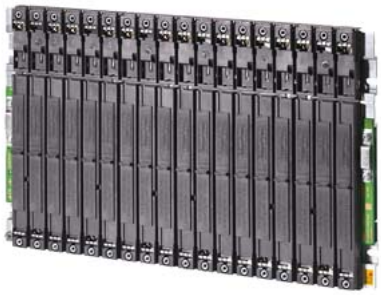

General information	
Product type designation	UR2-H
Hardware configuration	
Rack	
● Communication bus	Yes; Separated
● P bus	Yes; Separated
Slots	
● Number of slots	18; 2 segments with 9 slots each
Standards, approvals, certificates	
CE mark	Yes
UKCA mark	Yes
UL approval	Yes
FM approval	Yes
RCM (formerly C-TICK)	Yes
KC approval	Yes
EAC (formerly Gost-R)	Yes
CCC	Yes
Ambient conditions	
Ambient temperature during operation	
● min.	0 °C
● max.	60 °C
Ambient temperature during storage/transportation	
● min.	0 °C
● max.	70 °C
Mechanics/material	
rack profile material	aluminum
Dimensions	
Width	482.5 mm
Height	290 mm
Depth	27.5 mm
Weights	
Weight, approx.	3 kg
Classifications	

	Version	Classification
eClass	16	27-24-22-03
eClass	14	27-24-22-03
eClass	12	27-24-22-03
eClass	9.1	27-24-22-03

Subject to change without notice
© Copyright Siemens

eClass	9	27-24-22-03
eClass	8	27-24-22-03
eClass	7.1	27-24-22-03
eClass	6	27-24-22-03
ETIM	10	EC000810
ETIM	9	EC000810
ETIM	8	EC000810
ETIM	7	EC000810
IDEA	4	3560
UNSPSC	15	32-15-17-04

Approvals / Certificates

General Product Approval



Miscellaneous









General Product Approval

China RoHS

Miscellaneous

Manufacturer Declaration

EMV





For use in hazardous locations



For use in hazardous locations



Declaration of Conformity

FM





Type Examination Certificate

For use in hazardous locations



Maritime application







NK / Nippon Kaiji Kyokai



Maritime application





CCS (China Classification Society)

Environment



last modified: 6/7/2025

Subject to change without notice
© Copyright Siemens