
SIEMENS

Data sheet 6XV1830-3BH10

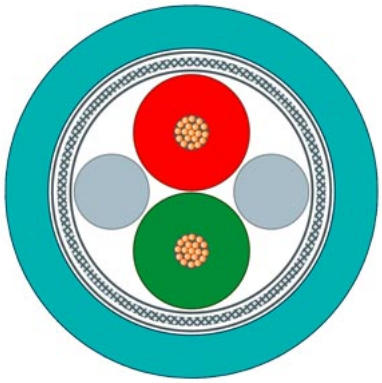

trailing cable for PROFIBUS 2-wire, shielded max. travel velocity: 80 m/min max. acceleration: 4 m/QS min. bending radius: approx. 65 mm min. 5 million bending cycles; sold by the meter, delivery unit max. 1000 m minimum order quantity 20 m.

product description	Wert fehlt!
further information / internet links / header	
internet link	
● to website: Industry Mall/RUGGEDCOM selector	Wert fehlt!
● to website: Siemens RUGGEDCOM	Wert fehlt!
● to website: Selection guide for cables and connectors	Wert fehlt!
● to web page: selection aid TIA Selection Tool	Wert fehlt!
● to website: Industrial communication	Wert fehlt!
● to website: Industry Mall	Wert fehlt!
● to website: Information and Download Center	Wert fehlt!
● to website: Image database	Wert fehlt!
● to website: CAx-Download-Manager	Wert fehlt!
● to website: Industry Online Support	Wert fehlt!

Subject to change without notice
© Copyright Siemens