
SIEMENS

Data sheet 3RX9026-0AA00

AS-i cable, shaped for external auxiliary voltage 24 V black, pure, oil-resistant 2 x 1.5 mm2, 1 km, on drum consists of 1000 m cable Shipbuilding approval

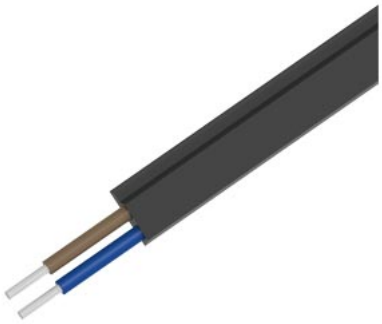

General technical data	
design of the product	AS-Interface shaped cables
operating voltage rated value	300 V
Mechanical data	
bending radius	
● for permanently laid cable minimum permissible	12 mm
● with moving cable minimum permissible	24 mm

Certificates/ approvals

General Product Approval	other	Environment
EAC, CE EG-Konf., UKCA	Confirmation, 产品合格 QC PASS	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RX9026-0AA00
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RX9026-0AA00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RX9026-0AA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RX9026-0AA00&lang=en

last modified: 11/19/2025

Subject to change without notice
© Copyright Siemens