SIEMENS

Data sheet 3RT2535-1AP00



power contactor, AC-3, 35 A, 18.5 kW / 400 V, 4-pole, 230 V AC, 50 Hz, main contacts: 2 NO + 2 NC, auxiliary contacts: 1 NO + 1 NC, screw terminal, size: S2

product brand name	SIRIUS
product designation	contactor
product type designation	3RT25
General technical data	
size of contactor	S2
product extension	
● function module for communication	No
● auxiliary switch	Yes
power loss [W] for rated value of the current	
● at AC in hot operating state per pole	2.2 W
● without load current share typical	6.5 W
type of calculation of power loss current-dependent	quadratic
insulation voltage	
● of main circuit with degree of pollution 3 rated value	690 V
● of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
● of main circuit rated value	6 kV
● of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	400 V
shock resistance at rectangular impulse	
● at AC	11.8 g / 5 ms, 7.4 g / 10 ms
shock resistance with sine pulse	
● at AC	18.5 g / 5 ms, 11.6 g / 10 ms
mechanical service life (operating cycles)	
● of contactor typical	10 000 000
● of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
● of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (day/month/year)	10/01/2014
Net Weight	1.1 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
● during operation	-40 ... +70 °C
● during storage	-55 ... +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Subject to change without notice
© Copyright Siemens

Main circuit	
number of poles for main current circuit	4
number of NO contacts for main contacts	2
number of NC contacts for main contacts	2
operational current	
● at AC-1 up to 690 V	
— at ambient temperature 40 °C rated value	60 A
— at ambient temperature 60 °C rated value	55 A
● at AC-2 at AC-3 at 400 V	
— per NO contact rated value	35 A
— per NC contact rated value	35 A
minimum cross-section in main circuit at maximum AC-1 rated value	16 mm²
operational current	
● at 1 current path at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	4.5 A
— at 220 V rated value	1 A
— at 440 V rated value	0.4 A
● with 2 current paths in series at DC-1	
— at 24 V rated value	55 A
— at 110 V rated value	45 A
— at 220 V rated value	5 A
— at 440 V rated value	1 A
● at 1 current path at DC-3 at DC-5	
— at 24 V per NC contact rated value	35 A
— at 24 V per NO contact rated value	35 A
— at 110 V per NC contact rated value	1.25 A
— at 110 V per NO contact rated value	2.5 A
— at 220 V per NC contact rated value	0.5 A
— at 220 V per NO contact rated value	1 A
— at 440 V per NC contact rated value	0.045 A
— at 440 V per NO contact rated value	0.1 A
● with 2 current paths in series at DC-3 at DC-5	
— at 24 V per NC contact rated value	55 A
— at 24 V per NO contact rated value	55 A
— at 110 V per NC contact rated value	12.5 A
— at 110 V per NO contact rated value	25 A
— at 220 V per NC contact rated value	2.5 A
— at 220 V per NO contact rated value	5 A
— at 440 V per NC contact rated value	0.135 A
— at 440 V per NO contact rated value	0.27 A
operating power at AC-2 at AC-3	
● at 230 V per NC contact rated value	11 kW
● at 230 V per NO contact rated value	11 kW
● at 400 V per NC contact rated value	18.5 kW
● at 400 V per NO contact rated value	18.5 kW
short-time withstand current in cold operating state up to 40 °C	
● limited to 1 s switching at zero current maximum	546 A; Use minimum cross-section acc. to AC-1 rated value
● limited to 5 s switching at zero current maximum	443 A; Use minimum cross-section acc. to AC-1 rated value
● limited to 10 s switching at zero current maximum	334 A; Use minimum cross-section acc. to AC-1 rated value
● limited to 30 s switching at zero current maximum	241 A; Use minimum cross-section acc. to AC-1 rated value
● limited to 60 s switching at zero current maximum	196 A; Use minimum cross-section acc. to AC-1 rated value
power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor	2.2 W
power loss [W] at AC-3e at 400 V for rated value of the operational current per conductor	2.2 W
no-load switching frequency	
● at AC	5 000 1/h

© Copyright Siemens

operating frequency	
● at AC-1 maximum	1 200 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil at AC	
● at 50 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	190 V·A
● at 50 Hz	190 V·A
inductive power factor with closing power of the coil	0.72
● at 50 Hz	0.72
apparent holding power of magnet coil at AC	16 V·A
● at 50 Hz	16 V·A
inductive power factor with the holding power of the coil	0.37
● at 50 Hz	0.37
closing delay	
● at AC	10 ... 80 ms
opening delay	
● at AC	10 ... 18 ms
arcing time	10 ... 20 ms
control version of the switch operating mechanism	AC
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	1
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
● at 230 V rated value	6 A
● at 400 V rated value	3 A
● at 500 V rated value	2 A
● at 690 V rated value	1 A
operational current at DC-12	
● at 24 V rated value	10 A
● at 48 V rated value	6 A
● at 60 V rated value	6 A
● at 110 V rated value	3 A
● at 125 V rated value	2 A
● at 220 V rated value	1 A
● at 600 V rated value	0.15 A
operational current at DC-13	
● at 24 V rated value	10 A
● at 48 V rated value	2 A
● at 60 V rated value	2 A
● at 110 V rated value	1 A
● at 125 V rated value	0.9 A
● at 220 V rated value	0.3 A
● at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
yielded mechanical performance [hp]	
● for 3-phase AC motor at 460/480 V rated value	20 hp
contact rating of auxiliary contacts according to UL	A600 / P600
Short-circuit protection	
design of the miniature circuit breaker for short-circuit protection of the auxiliary circuit up to 230 V	C characteristic: 10 A; 0.4 kA
design of the fuse link	
● for short-circuit protection of the main circuit	

Subject to change without notice
© Copyright Siemens

— with type of coordination 1 required	gG: 125 A (690 V, 100 kA)
— with type of coordination 2 required	gG: 63 A (690 V,100 kA)
● for short-circuit protection of the auxiliary switch required	gG: 10 A (690 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method side-by-side mounting	Yes
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
height	114 mm
width	75 mm
depth	130 mm
required spacing	
● with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
● for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— at the side	10 mm
— downwards	50 mm
● for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
● for main current circuit	screw-type terminals
● for auxiliary and control circuit	screw-type terminals
● at contactor for auxiliary contacts	Screw-type terminals
● of magnet coil	screw terminal
type of connectable conductor cross-sections	
● for main contacts	
— solid	2x (1 ... 35 mm²), 1x (1 ... 50 mm²)
— solid or stranded	2x (1 ... 35 mm²), 1x (1 ... 50 mm²)
— finely stranded with core end processing	2x (1 ... 25 mm²), 1x (1 ... 35 mm²)
● for AWG cables for main contacts	2x (18 ... 2), 1x (18 ... 1)
type of connectable conductor cross-sections	
● for auxiliary contacts	
— solid	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
— solid or stranded	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
— finely stranded with core end processing	2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
● for AWG cables for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)
AWG number as coded connectable conductor cross section for main contacts	18 ... 1
AWG number as coded connectable conductor cross section for auxiliary contacts	20 ... 14
Safety related data	
product function	
● **mirror contact according to IEC 60947-4-1**	Yes
● **positively driven operation according to IEC 60947-5-1**	No
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front

Subject to change without notice
© Copyright Siemens

Approvals Certificates

Environment	General Product Approval				
Environmental Confirmations	CCC	cULus	KC	EAC	CE EG-Konf.

General Product Approval	EMV	Test Certificates		Maritime application	
UKCA	RCM	Special Test Certificate	Type Test Certificates/Test Report	ABS	BUREAU VERITAS


Maritime application				other	
DNV	LRS	PRS	RINA	Confirmation	产品合格 QC PASS


Railway	Dangerous goods
Special Test Certificate	Transport Information

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2535-1AP00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT2535-1AP00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2535-1AP00&lang=en
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2535-1AP00
Kennlinien
https://curves.simaris.siemens.com/curves/3RT2535-1AP00

Subject to change without notice
© Copyright Siemens

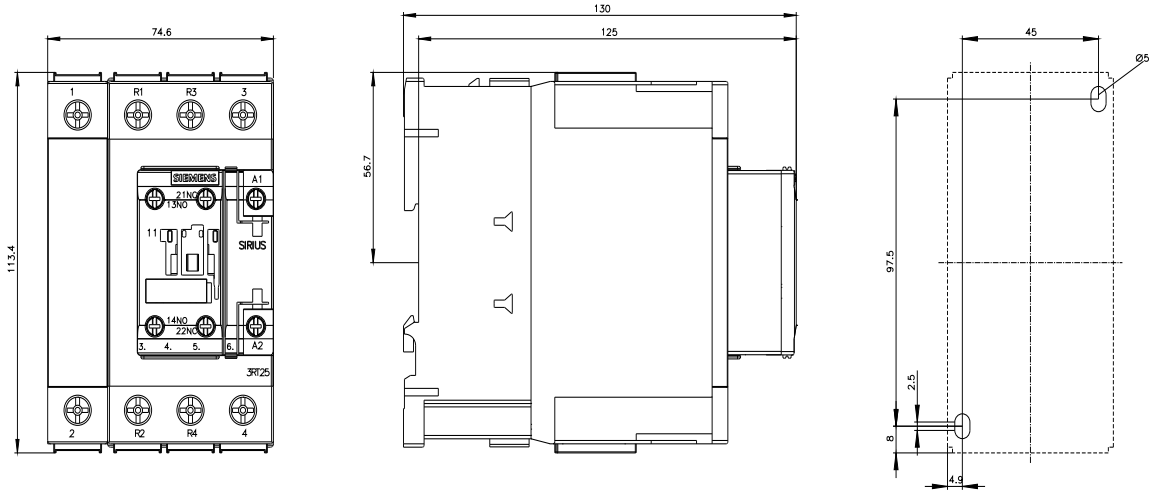

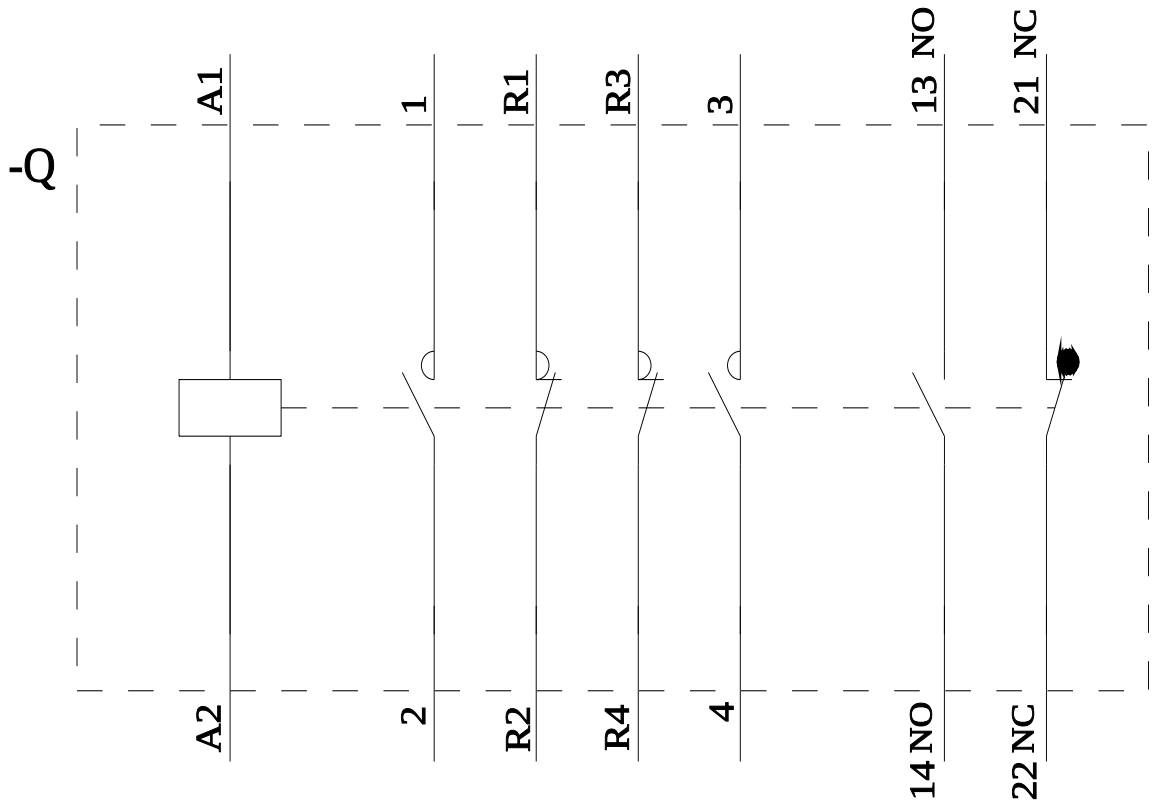

last modified: 7/22/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens