SIEMENS

Data sheet 3WL1110-2BB35-1AJ2

withdrawable circuit breaker without guide frame 3-pole, size I, IEC In=1000A to 690V, AC50/60Hz Icu=55kA at 500V rear connection horizontal Overcurrent release ETU 15 LI protection adjustable 0.5-1 in With manual operating mechanism with storage with mechanical request without 1st auxiliary release With 2nd auxiliary release "R", F3 Undervoltage, instant. 24 V DC 2NO+2NC


Model	
design of the product	IEC 60947-2
design of the actuating element	Pushbutton
type of the driving mechanism	Manual operating mechanism with mechanical closing
type of the driving mechanism / motor drive	No
design of the overcurrent release	ETU15B
General technical data	
number of poles	3
size of the circuit-breaker	1
utilization category	B
Voltage	
insulation voltage / rated value	1 000 V
operating voltage	
● at AC / at 50/60 Hz / rated value	690 V
Protection class	
protection class IP	IP20
protection class IP / on the front	IP20
protection function of the overcurrent release	LI
Dissipation	
power loss [W]	
● for rated value of the current / at AC / in hot operating state / per pole	65 W
● maximum	195 W
Main circuit	
operating frequency	
● 1 / rated value	50 Hz
● 2 / rated value	60 Hz
Auxiliary circuit	
number of NC contacts / for auxiliary contacts	2
number of NO contacts / for auxiliary contacts	2
Suitability	
suitability for use	system protection
Adjustable parameters	
adjustable current response value current / of the current-dependent overload release / initial value	500 A
Product details	
product component	
● **trip indicator**	Yes
● voltage trigger	No
● undervoltage release	Yes
design of the auxiliary switch	2 NO + 2 NC
product extension / optional / motor drive	Yes
Product function	
product function	
● grounding protection	No
● phase failure detection	No
Display and operation	


Subject to change without notice
© Copyright Siemens


display version	without display
Short circuit	
operating short-circuit current breaking capacity (Ics)	
● at 415 V / rated value	55 kA
● at 500 V / rated value	55 kA
● at 690 V / rated value	42 kA
maximum short-circuit current breaking capacity (Icu)	
● at 415 V / rated value	55 kA
● at 500 V / rated value	55 kA
● at 690 V / rated value	42 kA
Connections	
arrangement of electrical connectors / for main current circuit	without guide frame
type of electrical connection / for main current circuit	Blade contacts
Mechanical Design	
height	411.5 mm
width	311 mm
depth	337 mm
fastening method	drawer unit
mounting position	any
Net Weight	45 kg
Environmental conditions	
ambient temperature / during operation	
● minimum	-20 °C
● maximum	70 °C
ambient temperature / during storage	
● minimum	-40 °C
● maximum	70 °C
Further information	


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1110-2BB35-1AJ2
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3WL1110-2BB35-1AJ2
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1110-2BB35-1AJ2
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/3WL1110-2BB35-1AJ2

© Copyright Siemens

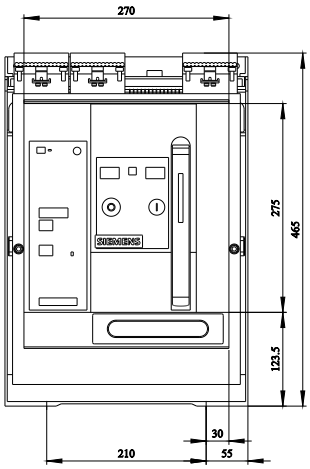


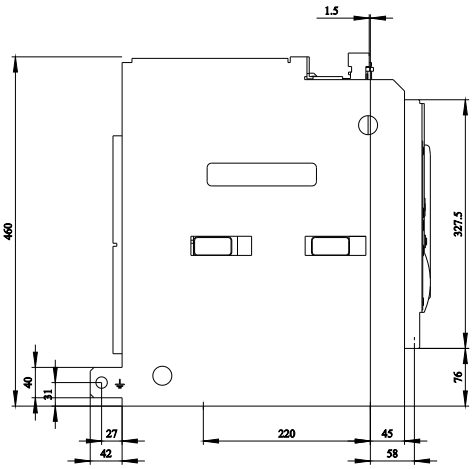

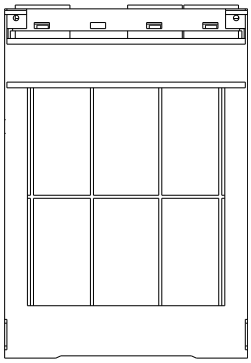

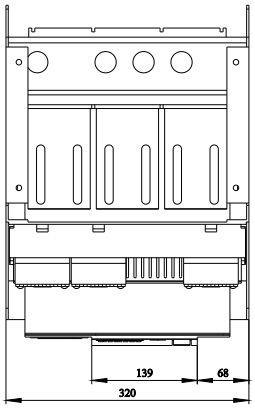

Subject to change without notice
© Copyright Siemens

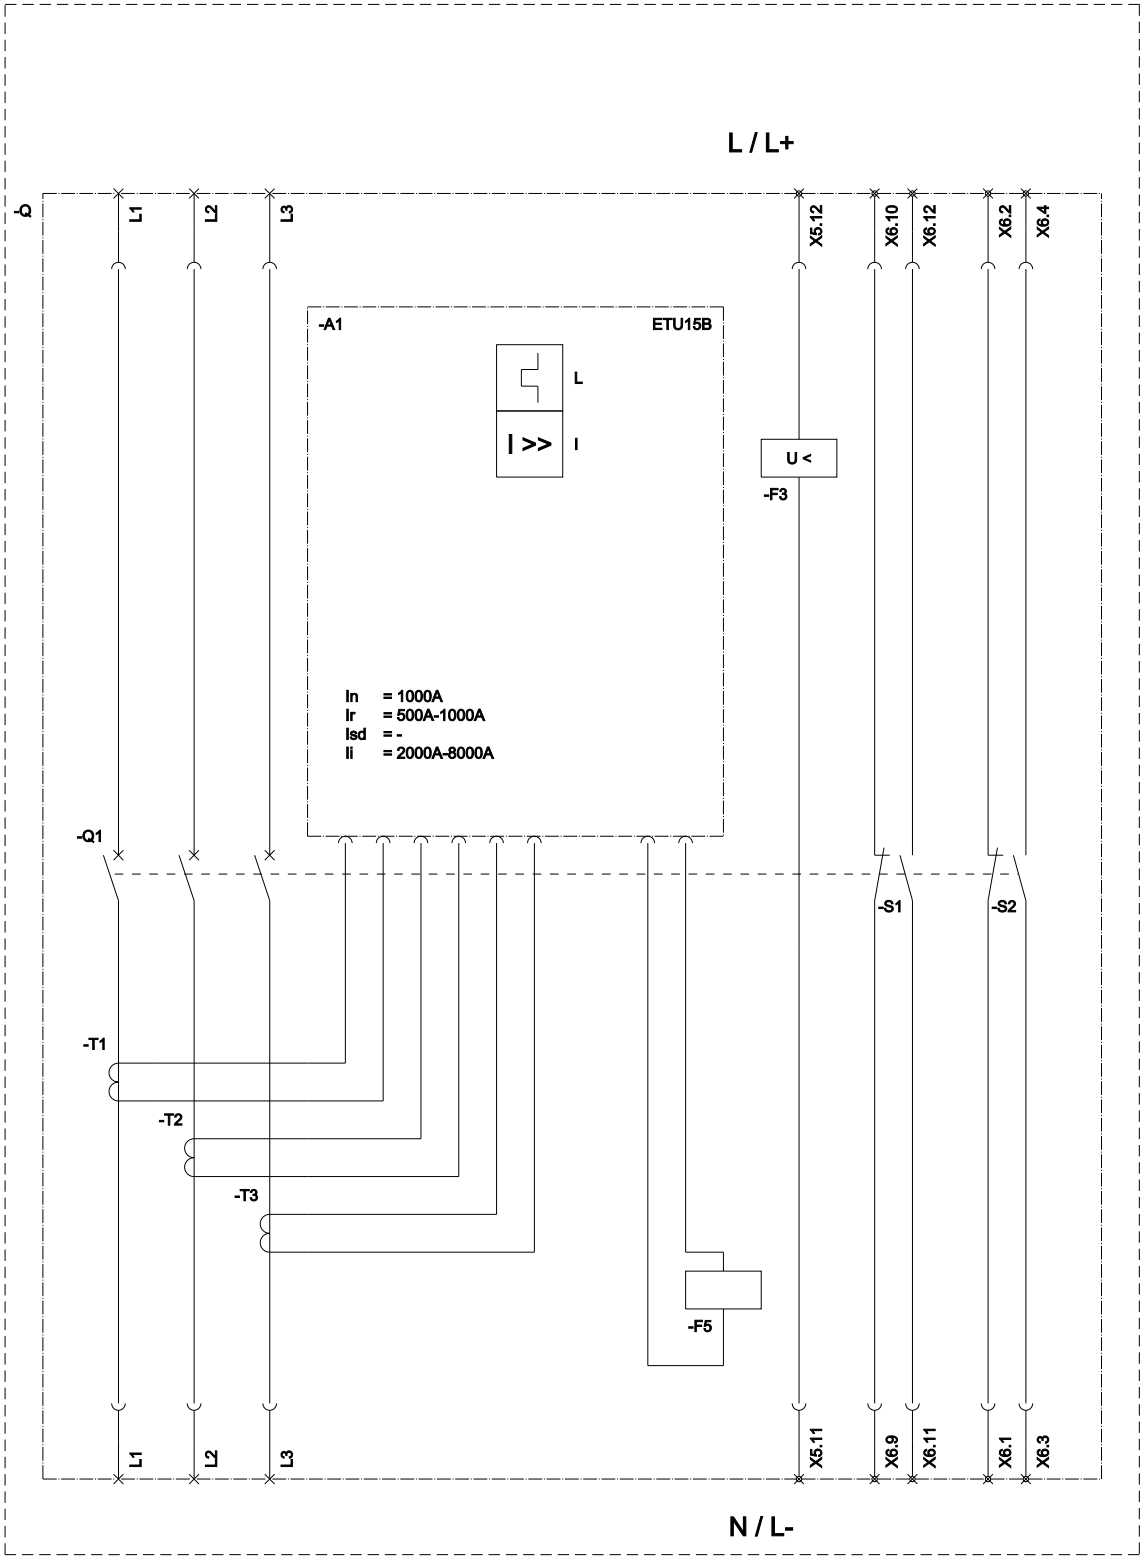

L (Long Time Delay / Überlastschutz); I (Instantaneous / Kurzschlussschutz, unverzögert); F3 (Undervoltage release / Unterspannungsauslöser);
F5 (Maglatch for trip unit / Auslösemagnet); S1 - S8 (Auxiliary switch / Hilfsschalter);

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens