SIEMENS

Data sheet 3VA2225-5KP42-0AA0



circuit breaker 3VA2 IEC Frame 250 breaking capacity class M Icu=55 kA @ 415 V 4-pole, line protection ETU850, LSI, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection adjustable (OFF, up to 100%) nut keeper kit

Model	
product brand name	SENTRON
product designation	Molded case circuit breaker
design of the product	Line protection
design of the overcurrent release	ETU850
protection function of the overcurrent release	LSI
number of poles	4
General technical data	
insulation voltage / rated value	800 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	48 W
power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	16 W
mechanical service life (operating cycles) / typical	25 000
electrical endurance (operating cycles) / at AC-1 / at 380/415 V	12 000
electrical endurance (operating cycles) / at AC-1 / at 690 V	8 400
product feature / for neutral conductors / upgradable/retrofittable / short-circuit and overload proof	No
ground-fault monitoring version	Without
product function	
● communication function	Yes
● other measurement function	Yes
Net Weight	2.829 kg
Current	
operational current	
● at 40 °C	250 A
● at 45 °C	250 A
● at 50 °C	250 A
● at 55 °C	238 A
● at 60 °C	225 A
● at 65 °C	213 A
● at 70 °C	200 A
Switching capacity according to IEC 60947	
switching capacity class of the circuit breaker	M
maximum short-circuit current breaking capacity (Icu)	
● at 240 V	85 kA

Subject to change without notice
© Copyright Siemens

● at 415 V	55 kA
● at 440 V	55 kA
● at 500 V	36 kA
● at 690 V	3 kA
operating short-circuit current breaking capacity (Ics)	
● at 240 V	85 kA
● at 415 V	55 kA
● at 440 V	55 kA
● at 500 V	36 kA
● at 690 V	3 kA
short-circuit current making capacity (Icm)	
● at 240 V	187 kA
● at 415 V	121 kA
● at 440 V	121 kA
● at 500 V	75.6 kA
● at 690 V	4.5 kA
Adjustable parameters	
product feature / for L-tripping / can be switched on/off	No
adjustable response value setting current (Ir) / of the L-trip / with I2t characteristic	
● minimum	100 A
● maximum	250 A
adjustable response value delay time (tr) / for L-tripping / with I2t characteristic	
● minimum	0.5 s
● maximum	15 s
adjustable response value setting current (Isd) / of S-trip / with I0t characteristic	
● minimum	150 A
● maximum	2 500 A
adjustable response value setting current (Isd) / of S-trip / with I2t characteristic	
● minimum	150 A
● maximum	2 500 A
adjustable response value delay time (tsd) / for S-tripping / with I0t characteristic	
● minimum	0.05 s
● maximum	0.5 s
adjustable response value delay time (tsd) / for S-tripping / with I2t characteristic	
● minimum	0.05 s
● maximum	0.5 s
adjustable response value setting current (Ii) / for I-tripping	
● minimum	375 A
● maximum	2 500 A
adjustable setting current (InN) / for N-tripping	
● minimum	50 A
● maximum	250 A
design of the N-conductor protection	adjustable OFF; 20% to 100%
product function / grounding protection	No
Mechanical Design	
product component	
● undervoltage release	No
● voltage trigger	No
● trip indicator	No
height [in]	7.13 in
height	181 mm
width [in]	5.51 in
width	140 mm
depth [in]	3.39 in
depth	86 mm

Subject to change without notice
© Copyright Siemens

Connections	
arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	on both sides nut keeper kit
type of connectable conductor cross-sections / for flat-bar terminal connection / minimum	13 x 1 mm
type of connectable conductor cross-sections / for flat-bar terminal connection / maximum	25 x 8 mm
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	tin
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	Yes
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
● during operation / minimum	-25 °C
● during operation / maximum	70 °C
● during storage / minimum	-40 °C
● during storage / maximum	80 °C
Environmental footprint	
global warming potential [CO2 eq] / total	61.814 kg
global warming potential [CO2 eq] / during manufacturing	14.6 kg
global warming potential [CO2 eq] / during operation	48.9 kg
global warming potential [CO2 eq] / after end of life	-2.2 kg
Siemens eco profile (SEP)	Siemens EcoTech
reference code / according to IEC 81346-2	Q

Approvals / Certificates

General Product Approval

Miscellaneous

TUEV

General Product Approval | **EMV** | **Test Certificates**

Confirmation

Miscellaneous

Special Test Certificate

Test Certificates | **Maritime application**

Type Test Certificates/Test Report

CCS (China Classification Society)

other | **Dangerous goods** | **Environment**

Miscellaneous | Miscellaneous | Confirmation

Transport Information

Environmental Confirmations

Environment

Subject to change without notice
© Copyright Siemens

Siemens EcoTech

Environmental Confirmations

EPD

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875

Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA2225-5KP42-0AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3VA2225-5KP42-0AA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA2225-5KP42-0AA0

CAx-Online-Generator
https://www.siemens.com/cax


Tender specifications
https://www.siemens.com/specifications

Kennlinien
https://curves.simaris.siemens.com/curves/3VA2225-5KP42-0AA0

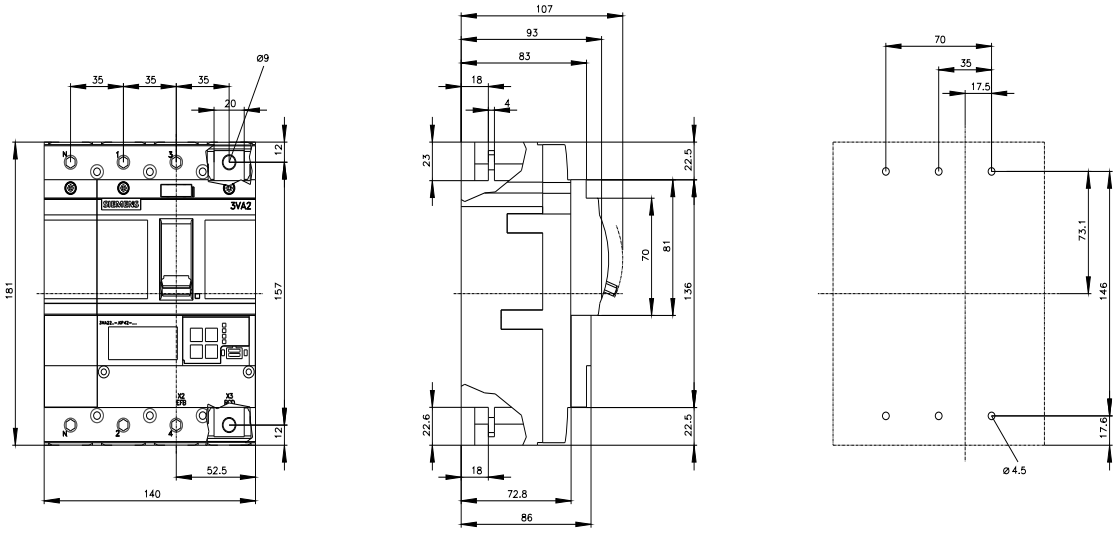



Subject to change without notice
© Copyright Siemens

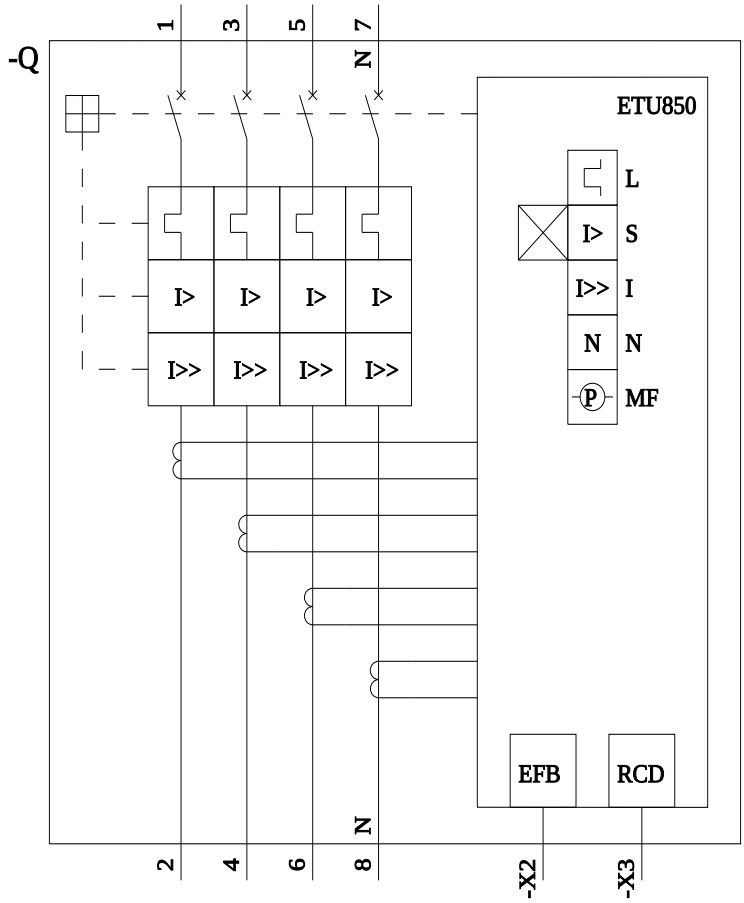

last modified: 9/2/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens