SIEMENS

Data sheet 3NA3482

Siemens EcoTech

LV HRC fuse element, with screw contacts, NH4, In: 1250 A, gG, Un AC: 500 V, Un DC: 400 V, Front indicator, live grip lugs



Figure similar

Model	
product brand name	SENTRON
product designation	LV HRC fuse link
design of the product	With screw contacts
design of an identification indicator	Front indicators
design of the switching contact	Non-corroding, silver-plated
design of the fuse link	LV HRC fuse link
General technical data	
size of fuse system according to EN 60269-1	NH4
operating class of the fuse link	gG
mounting type	non-insulated grip lugs
type of voltage of the operating voltage	AC/DC
operational current at AC rated value	1 250 A
supply voltage	
• at AC	500 V
• at DC	440 V
Protection class	
protection class IP	IP20, with connected conductors
Breaking Capacity	
breaking capacity at AC according to IEC 60269 rated value	120 kA
breaking capacity at DC with time constant ≤ 10 ms according to IEC 60269 rated value	25 kA
Dissipation	
power loss [W]	99 W
power loss [W] for rated value of the current at AC in hot operating state per pole	99 W
Mechanical Design	
width of the enclosure	101.8 mm
mounting position	Any, preferably vertical
Net Weight	2.68 kg
Environmental conditions	
ambient temperature during operation	
• minimum	-5 °C
• maximum	40 °C
environmental category	-20 to +50 at 95% relative humidity

Subject to change without notice
© Copyright Siemens

environmental category during storage	90% at 20°C

Certificates

reference code according to IEC 81346-2	FC

Approvals Certificates

Environment				General Product Approval	
Environmental Confirmations		Environmental Confirmations			Confirmation


General Product Approval		Test Certificates	Maritime application	other	
		Special Test Certificate		Miscellaneous	Confirmation

other	Railway
	Confirmation

Further information


Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3482
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3NA3482
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3482
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/3NA3482

Subject to change without notice
© Copyright Siemens

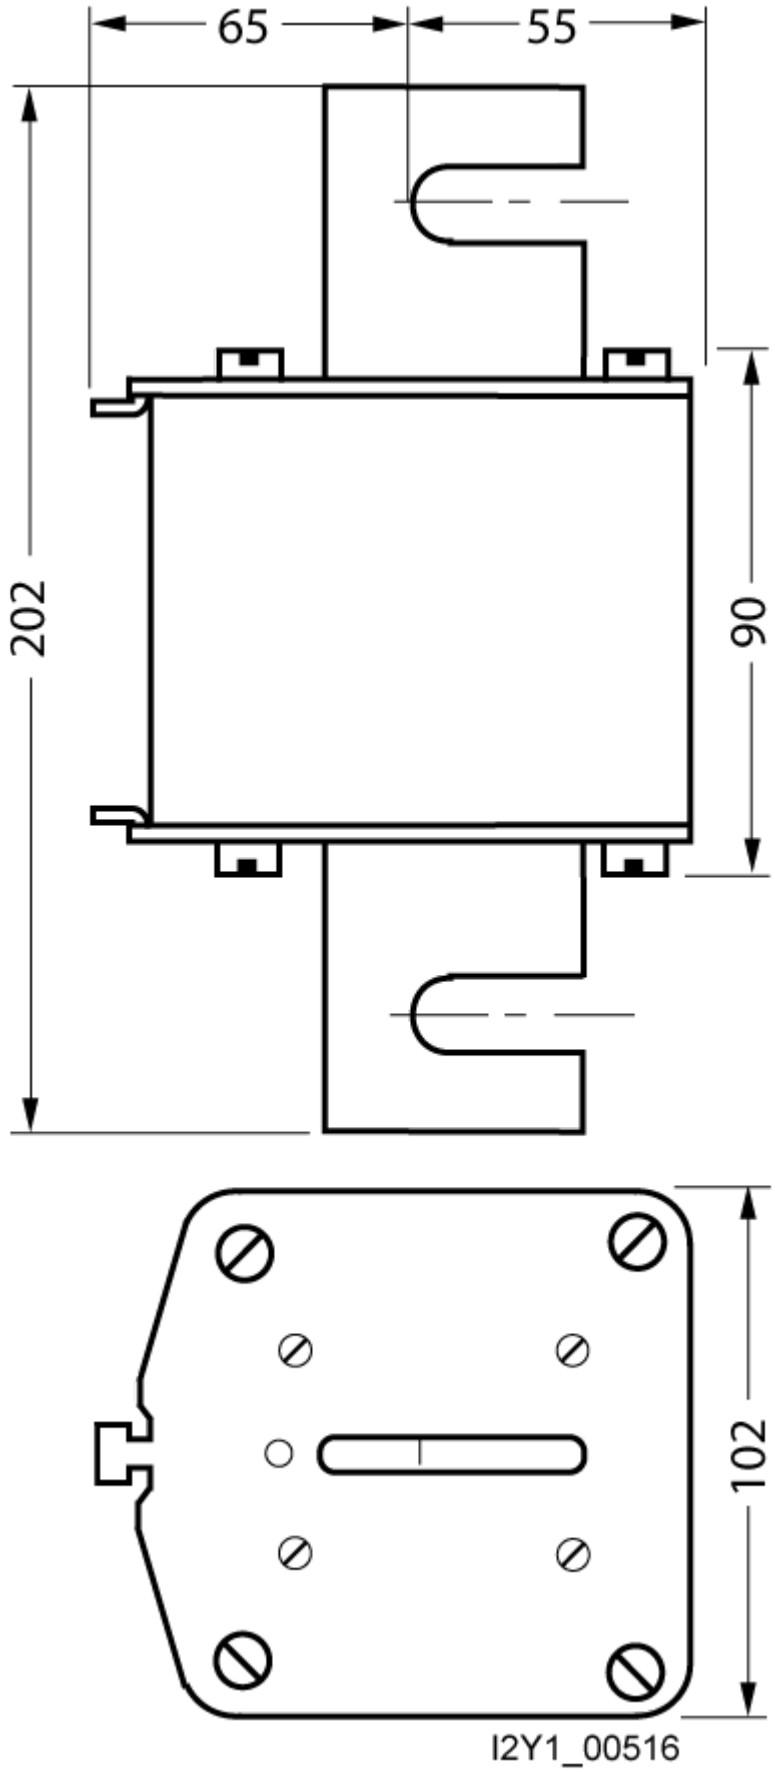


Subject to change without notice
© Copyright Siemens

-F

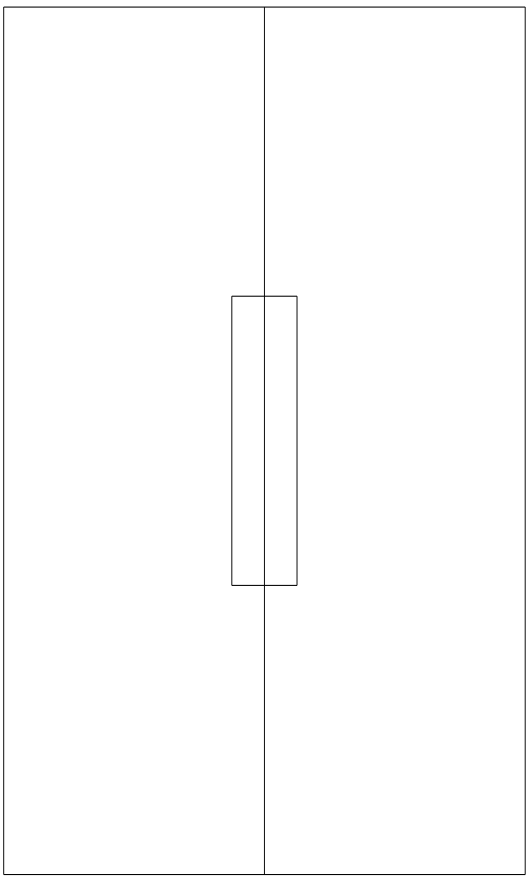

FU



last modified: 5/16/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens