SIEMENS

Data sheet BVP:262457

BD2-AK02X/F TAP-OFF UNIT BD2 UP TO 63A

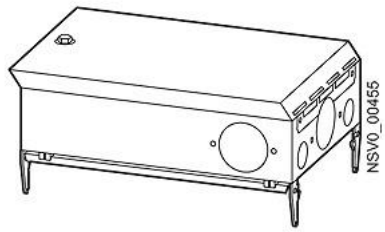


Figure similar

Model	
product designation	tap-off unit for BD2 busbar trunking system
operating voltage at AC	
● at 50 Hz rated value maximum	690 V
● at 60 Hz rated value maximum	690 V
Protection class	
protection class IP	IP54, mit Zusatzausruestung: IP55
Dissipation	
power loss [V·A] maximum	30 V·A
Main circuit	
operating frequency rated value	
● minimum	50 Hz
● maximum	60 Hz
operational current	
● for circuit 1 at AC at 50 Hz rated value maximum	63 A
● for circuit 1 at AC at 60 Hz rated value maximum	63 A
Tap-off points	
outgoing unit version	cable entry
size of the outgoing unit	02
number of poles of the outgoing unit	5
Mechanical Design	
height	160 mm
width	214 mm
length	331 mm
number of modular width units	9
product component locking mechanism	Yes
Net Weight	3.8 kg
Approvals Certificates	
General Product Approval	

CE
EG-Konf.

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875

Subject to change without notice
© Copyright Siemens

Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:262457
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/BVP:262457
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:262457
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/BVP:262457

last modified: 9/2/2024

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens