SIEMENS

## Data sheet 3ND1803




Figure similar

LV HRC fuse element, NH000, In: 10 A, aM, Un AC: 500 V, Front indicator, live grip lugs

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | LV HRC fuse link |
| **design of the product** | With blade contacts |
| **design of an identification indicator** | Front indicators |
| **design of the switching contact** | Non-corroding, silver-plated |
| **design of the fuse link** | LV HRC fuse link |
| **General technical data** | |
| **size of fuse system according to EN 60269-1** | NH000 |
| **operating class of the fuse link** | aM |
| **mounting type** | non-insulated grip lugs |
| **type of voltage of the operating voltage** | AC |
| **operational current at AC rated value** | 10 A |
| **supply voltage** | |
| ● at AC | 500 V |
| **Protection class** | |
| **protection class IP** | IP20, with connected conductors |
| **Breaking Capacity** | |
| **breaking capacity at AC according to IEC 60269 rated value** | 120 kA |
| **Dissipation** | |
| **power loss [W]** | 0.5 W |
| **power loss [W] for rated value of the current at AC in hot operating state per pole** | 1 W |
| **Mechanical Design** | |
| **width of the enclosure** | 21 mm |
| **mounting position** | Any, preferably vertical |
| **Net Weight** | 130 g |
| **Environmental conditions** | |
| **ambient temperature during operation** | |
| ● minimum | -5 °C |
| ● maximum | 40 °C |
| **environmental category** | -20 to +50 at 95% relative humidity |
| **environmental category during storage** | 90% at 20°C |
| **Certificates** | |
| **reference code according to IEC 81346-2** | FC |
| **Approvals Certificates** | |

| Environment | General Product Approval |
|---|---|

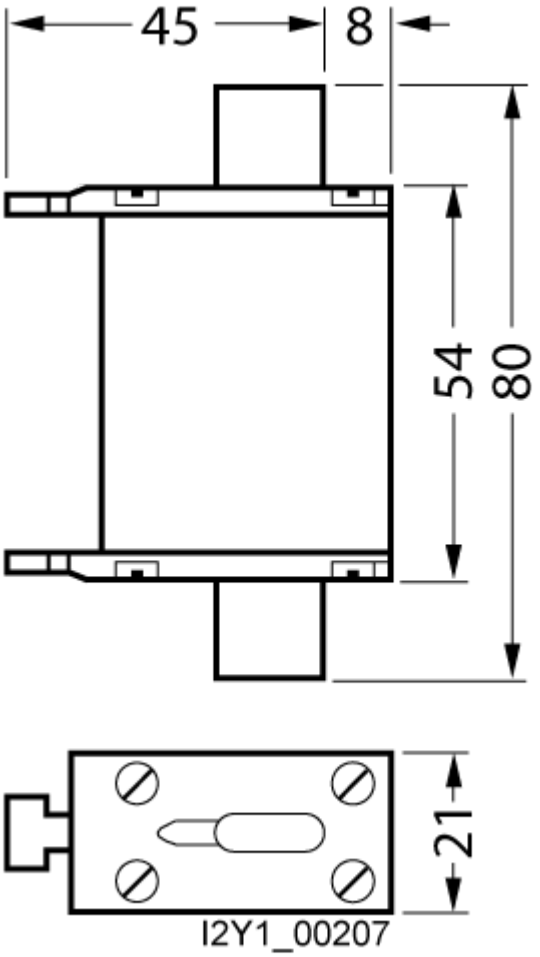

Subject to change without notice
© Copyright Siemens

Environmental Confirmations | Environmental Confirmations | Confirmation

| General Product Approval | Test Certificates | other |
|---|---|---|
| | Miscellaneous | Confirmation |

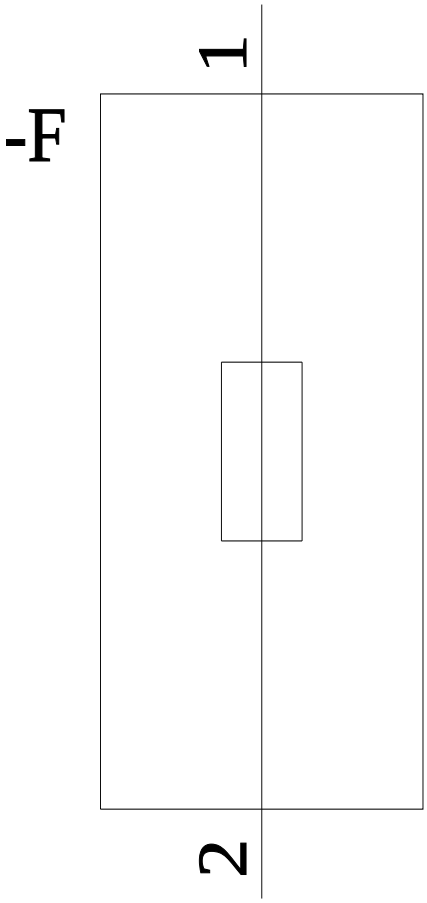
## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ND1803
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3ND1803
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3ND1803
**CAx-Online-Generator**
https://www.siemens.com/cax
**Tender specifications**
https://www.siemens.com/specifications
**Kennlinien**
https://curves.simaris.siemens.com/curves/3ND1803





© Copyright Siemens




**last modified:** 5/16/2026


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens