SIEMENS

Data sheet 3RQ3901-0A

connecting comb 2-pole (only suitable for signal converter SIRIUS 3RS7 and coupling relay SIRIUS 3RQ3)



product brand name	SIRIUS
product category	Connecting combs
product designation	Connecting comb
design of the product	For linking the same potentials, current carrying capacity for infeed max. 6 A/2-pole
product type designation	3RQ3
General technical data	
display version LED	No
product component	
● semi-conductor output	No
flammability class of enclosure material	UL94 V-0
reference code according to IEC 81346-2	X
Substance Prohibitance (day/month/year)	03/25/2015
Net Weight	0.6 g
Mechanical data	
product component plug-in socket	No
Connections/ Terminals	
product function removable terminal	No
Installation/ mounting/ dimensions	
height	3.3 mm
width	12.5 mm
depth	11 mm
Ambient conditions	
ambient temperature	
● during operation	-25 ... +60 °C
● during storage	-40 ... +85 °C
● during transport	-40 ... +85 °C
Approvals Certificates	

Environment	General Product Approval					EMV
Environmental Confirmations	CSA	EAC	UKCA	CE EG-Konf.	KC	


Maritime application	**other**

Subject to change without notice
© Copyright Siemens

Confirmation

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3901-0A
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3901-0A
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0A
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3901-0A&lang=en

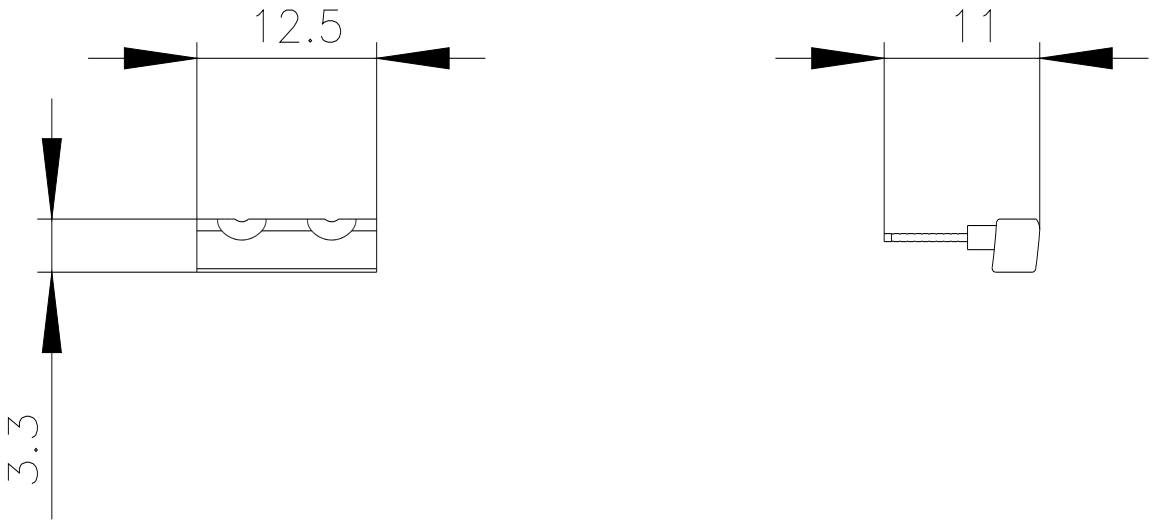

last modified: 4/1/2025

Subject to change without notice
© Copyright Siemens