SIEMENS

Data sheet LZS:RT4B4S15



plug-in relay complete unit, 2 changeover contacts, 115 V AC, LED module red, base with logical isolation, screw terminal, 3.5 mm pinning

product brand name	SIRIUS
product designation	Coupling relay with plug-in relay
product type designation	LZS
General technical data	
display version LED	Yes
percental drop-out voltage related to the input voltage	15 %
operating frequency without load	36 000 1/h
operating frequency with load	360 1/h
switching behavior	monostable
mechanical service life (operating cycles) typical	5 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	80 000
thermal current	8 A
reference code according to IEC 81346-2	K
Substance Prohibitance (day/month/year)	05/01/2012
Net Weight	0.06 kg
Control circuit/ Control	
control supply voltage at AC	
● at 50 Hz rated value	115 V
● at 60 Hz rated value	115 V
control supply voltage frequency	
● 1 rated value	50 Hz
● 2 rated value	60 Hz
supply voltage frequency for auxiliary and control circuit rated value	50 ... 60 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
● initial value	0.9
● full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
● initial value	0.9
● full-scale value	1.1
Switching Function	
design of the switching function	changeover switch
Mechanical data	
product component plug-in socket	Yes
design of the snap-on socket base	Socket with logic isolation
design of the relay operating mechanism	poled
Short-circuit protection	
design of the fuse link for short-circuit protection of the auxiliary	fuse gG: 10 A

Subject to change without notice
© Copyright Siemens

switch required	
Auxiliary circuit	
type of switching contact	Change-over contact
material of switching contacts	AgNi 90/10
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	2
Main circuit	
type of voltage	AC
Display	
display version as status display by LED	LED red
Connections/ Terminals	
product function removable terminal	No
type of electrical connection	screw terminal
type of connectable conductor cross-sections	
● solid	1x (1,0 ... 2,5), 2x 1,0, 2x 1,5, 2x 2,5
● finely stranded with core end processing	1x (1.0 ... 1.5), 2x 1.0, 2x 1.5
● for AWG cables solid	1x (18 ... 14), 2x 18, 2x 16, 2x 14
connectable conductor cross-section	
● solid	1 ... 2.5 mm²
● finely stranded with core end processing	1 ... 1.5 mm²
AWG number as coded connectable conductor cross section	
● solid	18 ... 14
tightening torque with screw-type terminals	0.5 ... 0.7 N·m
Installation/ mounting/ dimensions	
mounting position	any
fastening method	snap-on mounting
height	77 mm
width	15.5 mm
depth	71 mm
required spacing	
● with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
● for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
● for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
Ambient conditions	
ambient temperature	
● during operation	-40 ... +70 °C
● during storage	-20 ... +70 °C
● during transport	-20 ... +70 °C
Approvals Certificates	

Environment	General Product Approval	Test Certificates

© Copyright Siemens

Environmental Confirmations


Type Test Certificates/Test Report

other


Confirmation

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:RT4B4S15
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:RT4B4S15
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/LZS:RT4B4S15
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:RT4B4S15&lang=en

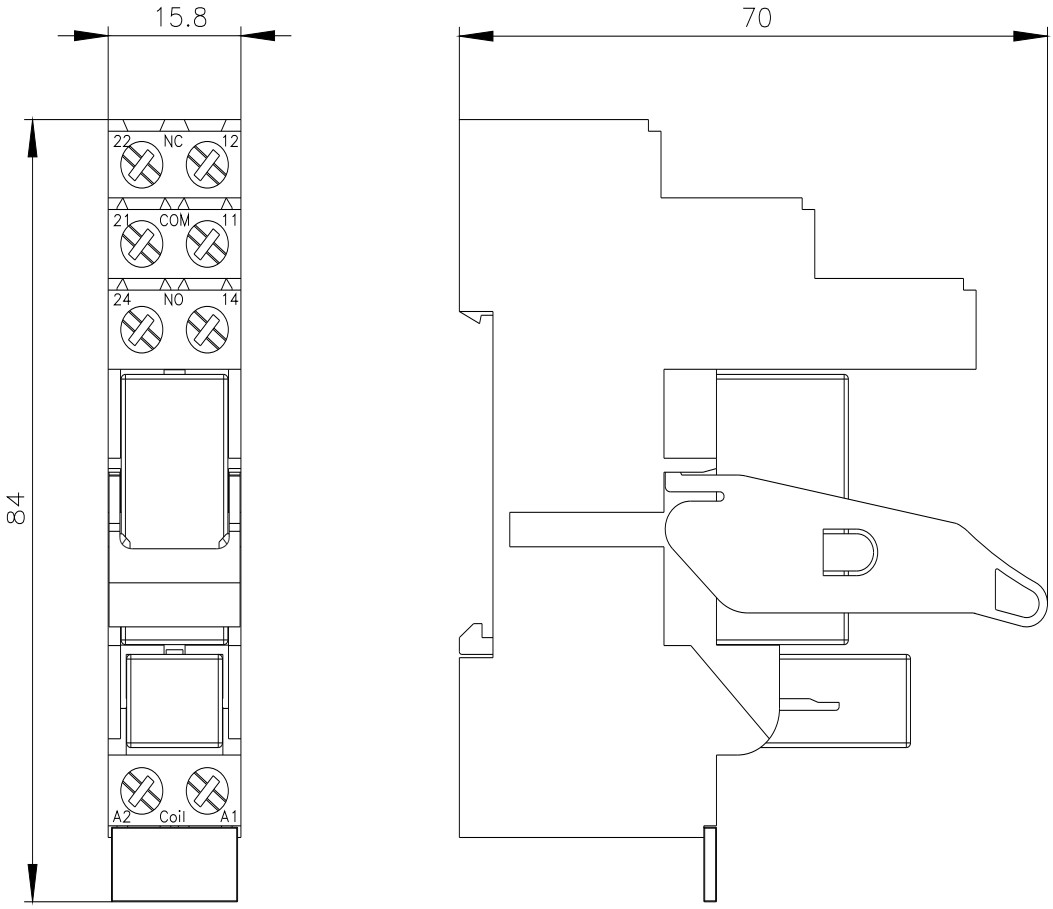

Subject to change without notice
© Copyright Siemens

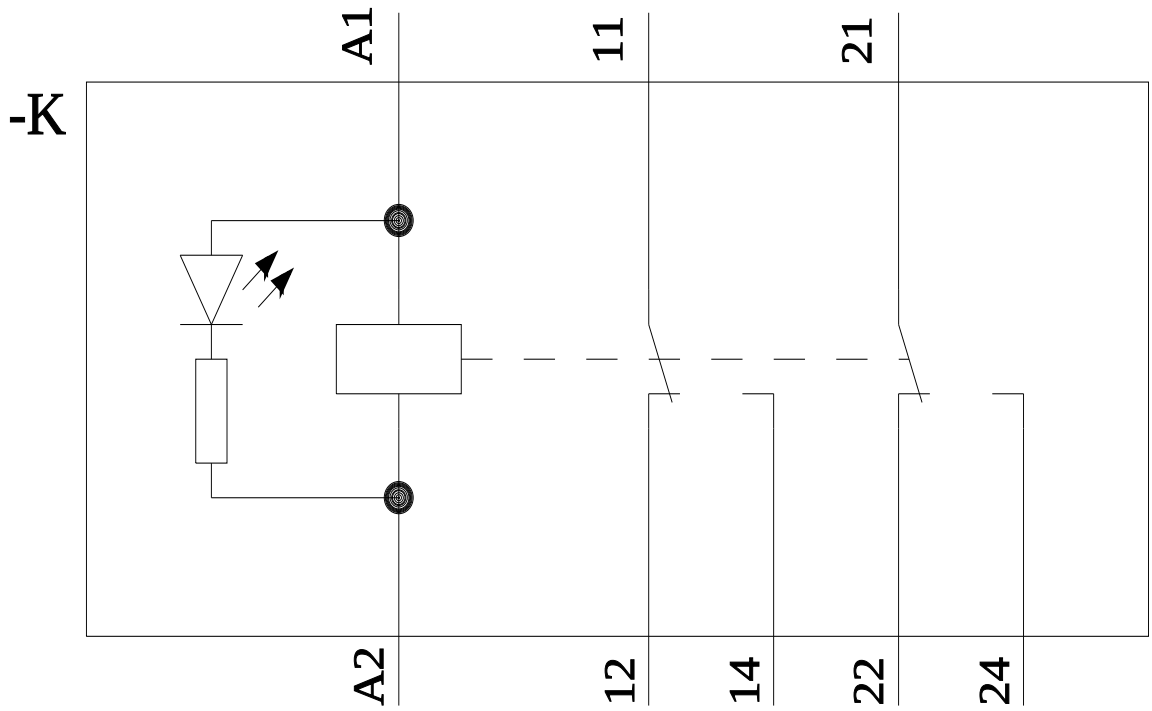

last modified: 7/22/2026

Subject to change without notice
© Copyright Siemens