EXTERNAL LINKS

QR of Manual

www.adfweb.com/download/
filefold/MN67B17_ENG.pdf

QR of Box-Sheet

www.adfweb.com/download/
filefold/BS67B17-B2_ENG.pdf

QR of Software

www.adfweb.com/download/
filefold/SW67B17.zip

BOX SHEET

OPC UA Client / J1939 - Converter

Box Sheet for order code: HD67B17-B2
Document code: BS67B17-B2
V1.001

ADFweb.com srl
Strada Nuova, 17, IT-31010 Mareno di Piave, Treviso - Italy

CONNECTION SCHEME

Order code: HD67B17-B2


Dip-Switch B:
-Dip1 – Termination CAN line

= Open = 120 ohm

Dip-Switch A:
-Dip1 – Functioning Mode

= Normal Mode

= Boot Mode

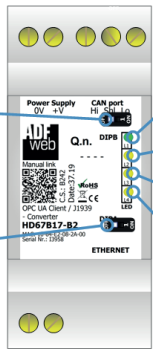

Led1:
Green
Device state

Led2:
Yellow
OPC UA comm.


Led3:
Yellow
J1939 comm.

Led4:
Yellow
Error state



Connector3:
Ethernet Port
(RJ45 Plug)

Led5:
Green
Link Ethernet



Connector4:
CAN port

Hi = High wire
Shl = Shield* (to Isolated Ground)
Lo = Low wire

Connector1:
Power Supply

0V = Ground
+V = Positive wire

V AC: min 8V ; max 24V
V DC: min 12V ; max 35V

Order code: HD67B17-B2