SIEMENS

## Data sheet 3LD9200-6C




Auxiliary switch, 2 NO, accessory for Main and emergency switching-off switch 3LD2, floor mounting, installation in distribution boards, molded-plastic encapsulation and for molded case switch 3LD5 UL floor mounting

| | |
|---|---|
| **Model** | |
| **product brand name** | SENTRON |
| **product designation** | auxiliary switch |
| **design of the product** | accessories for 3LD2 main and EMERGENCY-OFF switches, floor mounting, installation in distribution boards, molded-plastic enclosure |
| **operational current** | |
| ● at AC-15 at 110 V rated value | 6 A |
| ● at AC-15 at 230 V rated value | 3 A |
| ● at DC-13 at 24 V rated value | 4 A |
| **suitability for use** | for 3LD2 floor mounting, distribution board mounting, in the enclosure, with EMC shield plate and for 3LD5 UL floor mounting |
| **special product feature** | NO: lagging during switching ON, leading during switching OFF the 3LD switch. NC: leading during switching ON, lagging during switching OFF the 3LD switch |
| **Accessories** | |
| **accessories** | auxiliary switch, 2 NO |
| **tightening torque with screw-type terminals** | |
| ● minimum | 0.8 N·m |
| ● maximum | 1.2 N·m |
| **type of connectable conductor cross-sections for auxiliary contacts** | |
| ● **solid** | 2x (0.75-2.5 mm²), 1x 4 mm² |
| ● **finely stranded with core end processing** | 2x (0.75-2.5 mm²), 1x 4 mm² |
| ● **stranded** | 2x (0.75-2.5 mm²), 1x 4 mm² |
| **Mechanical Design** | |
| **Net Weight** | 25 g |
| **Approvals Certificates** | |


| **Environment** | | **General Product Approval** | | | |
|---|---|---|---|---|---|
| Environmental Confirmations | Environmental Confirmations | | | | |


| **General Product Approval** | | **other** | |
|---|---|---|---|
| Confirmation | | Confirmation | |


Subject to change without notice
© Copyright Siemens

## Further information

**Information on the packaging**
https://support.industry.siemens.com/cs/ww/en/view/109813875
**Information for data generation and storage**
https://support.industry.siemens.com/cs/ww/en/view/109995012
**Information- and Downloadcenter (Catalogs, Brochures,…)**
https://www.siemens.com/lowvoltage/catalogs
**Industry Mall (Online ordering system)**
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9200-6C
**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
https://support.industry.siemens.com/cs/ww/en/ps/3LD9200-6C
**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9200-6C
**CAx-Online-Generator**
https://www.siemens.com/cax
**Tender specifications**
https://www.siemens.com/specifications
**Kennlinien**
https://curves.simaris.siemens.com/curves/3LD9200-6C



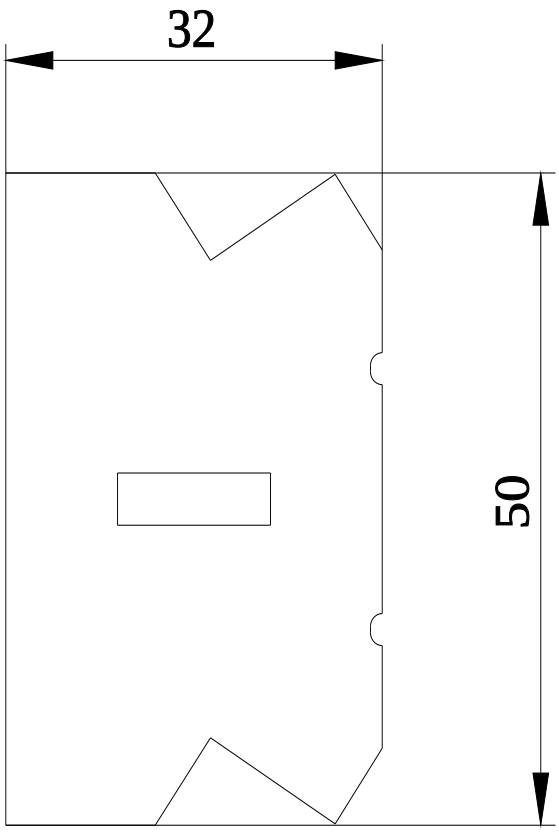
**last modified:** 9/19/2026


Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens