SIEMENS

Data sheet 8WH1000-0AF00



Terminal, screw terminal, through-type terminal, 2.5 mm², gray

Model	
product brand name	SENTRON
product designation	Terminal blocks
design of the product	through-type terminal
product version	through-type terminal, for mounting on mounting rail acc. to IEC 60715
design of terminal terminal levels internally linked	No
General technical data	
terminal contact spacing	5 mm
operating voltage rated value	1 000 V
Protection class	
combustibility class according to UL 94	V0
Main circuit	
operational current rated value	24 A
Appearance	
color	grey
Product details	
product component required end cover plate	Yes
Number	
number of terminal levels	1
number of terminal points per terminal level	2
Connections	
connectable conductor cross-section solid	
● minimum	0.14 mm²
● maximum	4 mm²
connectable conductor cross-section stranded	
● minimum	1.5 mm²
● maximum	0.14 mm²
connectable conductor cross-section finely stranded	
● with core end processing minimum	0.14 mm²
● with core end processing maximum	2.5 mm²
● without core end processing minimum	0.14 mm²
● without core end processing maximum	4 mm²
tightening torque with screw-type terminals	
● minimum	0.6 N·m
● maximum	1 N·m
type of connection 1	screw-type terminal
type of connection 2	screw-type terminal
position of the terminal	lateral

Subject to change without notice
© Copyright Siemens

Mechanical Design	
height	48 mm
height with lowest-profile installation	47.5 mm
depth	46.9 mm
length	48 mm
fastening method	TH35 DIN rail
Net Weight	7.8 g
material of the insulating body	PA
Environmental conditions	
ambient temperature during operation	
• minimum	-60 °C
• maximum	105 °C

Approvals Certificates


Environment		General Product Approval			
Environmental Con-firmations	Environmental Con-firmations				

General Product Approval		other		
Confirmation		Confirmation		Miscellaneous

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH1000-0AF00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/8WH1000-0AF00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
https://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH1000-0AF00
CAx-Online-Generator
https://www.siemens.com/cax
Tender specifications
https://www.siemens.com/specifications
Kennlinien
https://curves.simaris.siemens.com/curves/8WH1000-0AF00

© Copyright Siemens

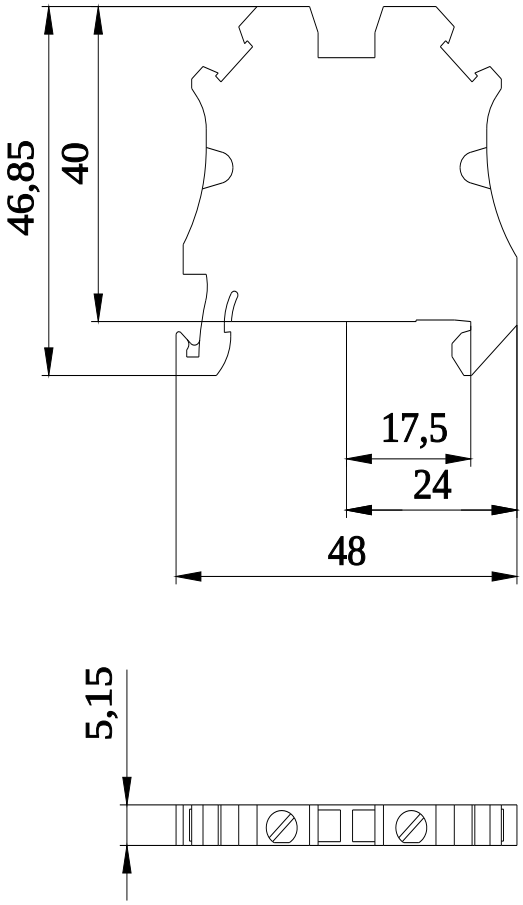

last modified: 5/9/2025

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens