SIEMENS

Data sheet 3RV2742-5ED10

Siemens EcoTech

circuit breaker size S3 for system protection with approval circuit breaker UL 489, CSA C22.2 no. 5-02 thermal release 30 A short-circuit release 390 A screw terminal



product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For system protection according to UL 489/CSA C22.2 No. 5
product type designation	3RV2
General technical data	
Product equipment of circuit breaker for motor protection complete unit with protection device	Yes
size of the circuit-breaker	S3
product function disconnector functionality	Yes
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
● at AC in hot operating state	14 W
● at AC in hot operating state per pole	4.7 W
type of calculation of power loss current-dependent	quadratic
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for protective separation	
● in networks with ungrounded star point between main and auxiliary circuit	400 V
● in networks with grounded star point between main and auxiliary circuit	400 V
protection class IP	
● on the front according to IEC 60529	IP20
● on the front	IP20
● of the terminal	IP00
shock resistance according to IEC 60068-2-27	25 g / 11 ms (rectangular impulse and sine pulse)
mechanical service life (operating cycles)	
● of the main contacts typical	25 000
● of auxiliary contacts typical	25 000
electrical endurance (operating cycles) typical	25 000
reference code according to IEC 81346-2	Q
continuous current rated value	30 A
Substance Prohibitance (day/month/year)	03/01/2017
SVHC substance name	Lead CAS-No. 7439-92-1
Net Weight	2.169 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m

Subject to change without notice
© Copyright Siemens

ambient temperature	
● during operation	-20 ... +60 °C
● during storage	-50 ... +80 °C
● during transport	-50 ... +80 °C
temperature compensation	-20 ... +60 °C
relative humidity during operation	10 ... 95 %
Main circuit	
number of poles for main current circuit	3
type of voltage for main current circuit	AC
operating voltage	
● rated value	600 V
● rated value	20 ... 600 V
operating frequency rated value	50 ... 60 Hz
operational current rated value	30 A
Auxiliary circuit	
type of voltage for auxiliary and control circuit	AC/DC
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
● ground fault detection	No
● phase failure detection	No
design of the overload release	thermal
protection function thermal overload protection (ANSI 49)	Yes
maximum short-circuit current breaking capacity (Icu)	
● at AC at 240 V rated value	100 kA
● at AC at 400 V rated value	100 kA
● at 480 AC Y/277 V according to UL 489 rated value	65 kA
● at 480 V AC according to UL 489 rated value	65 kA
operating short-circuit current breaking capacity (Ics) at AC	
● at 240 V rated value	100 kA
● at 400 V rated value	50 kA
response value current of instantaneous short-circuit trip unit	390 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
Mounting method of circuit breaker for Transformer protection, Generator protection and system protection optional standard bar mounting	Yes
height	170 mm
width	70 mm
depth	176 mm
required spacing	
● for grounded parts at 400 V	
— downwards	90 mm
— upwards	90 mm
— at the side	10 mm
● for live parts at 400 V	
— downwards	90 mm
— upwards	90 mm
— at the side	10 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	No
type of electrical connection	

Subject to change without notice
© Copyright Siemens

● for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
● for main contacts	
— solid	2x (2.5 ... 16 mm²)
— solid or stranded	2x (2,5 ... 50 mm²), 1x (10 ... 70 mm²)
— finely stranded with core end processing	2x (2.5 ... 35 mm²), 1x (2.5 ... 50 mm²)
— finely stranded without core end processing	2x (10 ... 35 mm²), 1x (10 ... 50 mm²)
● for AWG cables for main contacts	10 only front clamping point
● for AWG cables for main contacts for box terminal using the front clamping point	10 only front clamping point
connectable conductor cross-section for main contacts	
● finely stranded with core end processing	2.5 ... 50 mm²
● finely stranded without core end processing	10 ... 50 mm²
AWG number as coded connectable conductor cross section for main contacts	10
tightening torque	
● for main contacts with screw-type terminals	4.5 ... 6 N·m
design of screwdriver shaft	Hexagonal socket
size of the screwdriver tip	4 mm
design of the thread of the connection screw	
● for main contacts	M8
Safety related data	
product function suitable for safety function	Yes
suitability for use	
● safety-related switching on	No
● safety-related switching OFF	Yes
service life maximum	10 a
test wear-related service life necessary	Yes
proportion of dangerous failures	
● with low demand rate according to SN 31920	40 %
● with high demand rate according to SN 31920	50 %
B10 value with high demand rate according to SN 31920	5 000
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
ISO 13849	
device type according to ISO 13849-1	3
overdimensioning according to ISO 13849-2 necessary	Yes
IEC 61508	
safety device type according to IEC 61508-2	Type A
T1 value	
● for proof test interval or service life according to IEC 61508	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	
Environmental Product Declaration	
● global warming potential [CO2 eq] / during manufacturing	18.5 kg
● global warming potential [CO2 eq] / during sales	1.24 kg
● global warming potential [CO2 eq] / during operation	265 kg
● global warming potential [CO2 eq] / after end of life	-1.5 kg
● global warming potential [CO2 eq] / total	283.24 kg

Environment	**General Product Approval**

Subject to change without notice
© Copyright Siemens

Environmental Confirmations


General Product Approval				Test Certificates	
				Special Test Certificate	Type Test Certificates/Test Report


Maritime application	other			
	Miscellaneous	Confirmation	Miscellaneous	

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information for data generation and storage
https://support.industry.siemens.com/cs/ww/en/view/109995012
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2742-5ED10
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RV2742-5ED10
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2742-5ED10&lang=en
Cax online generator
https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2742-5ED10
Kennlinien
https://curves.simaris.siemens.com/curves/3RV2742-5ED10

Subject to change without notice
© Copyright Siemens

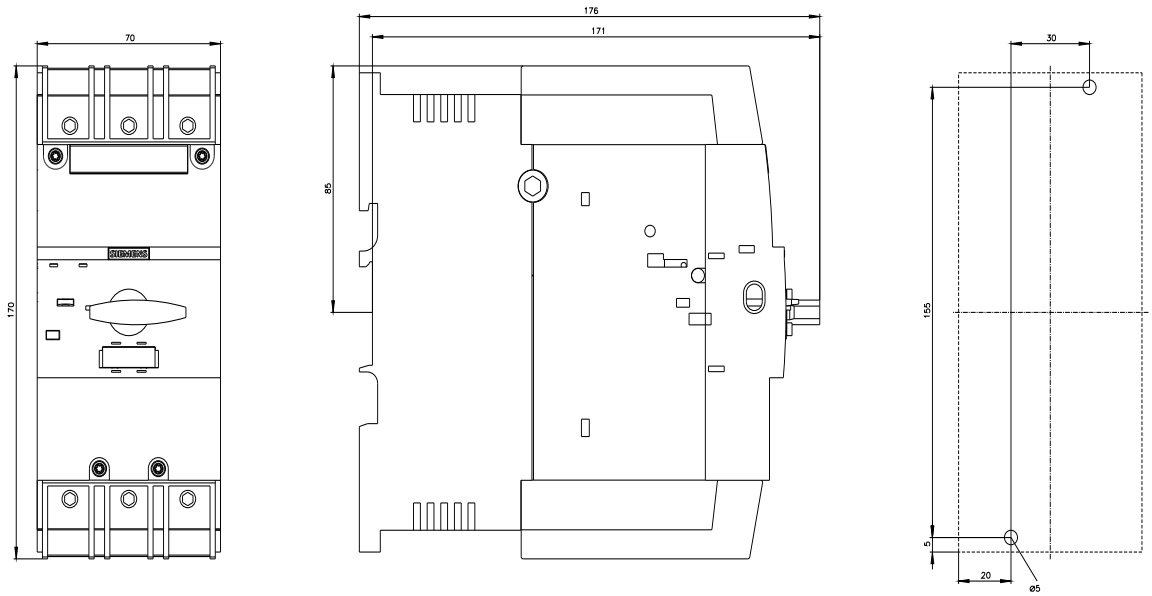

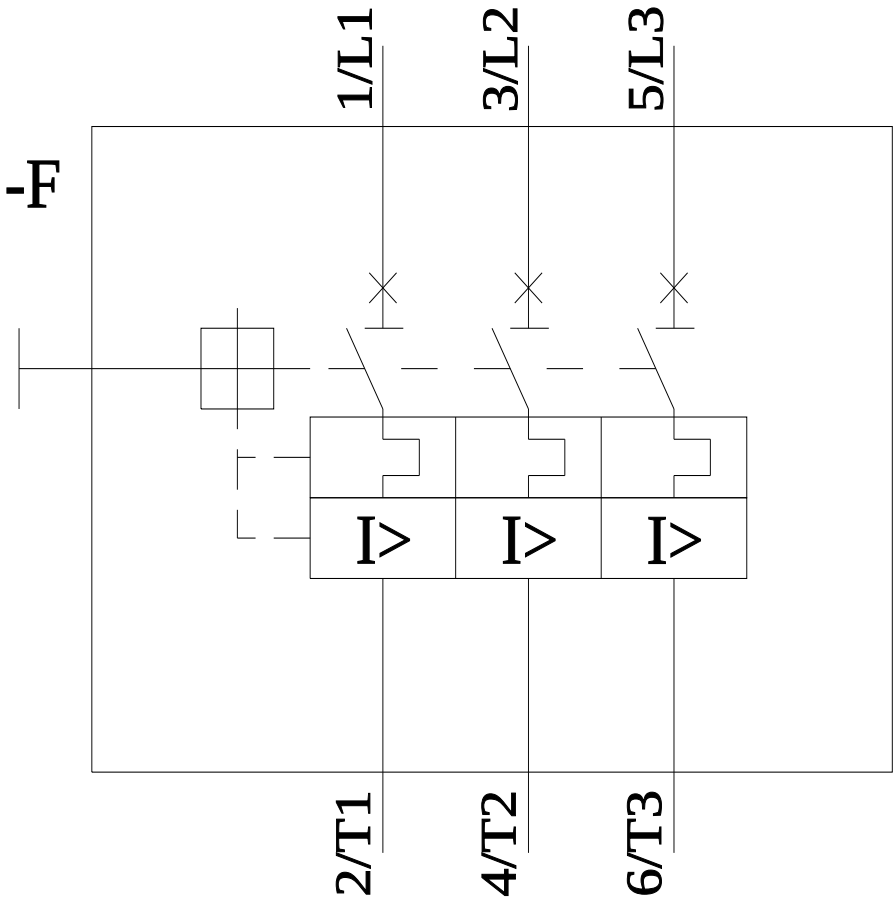

last modified: 5/5/2026

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens